Connect Tech Inc.

COM Express Type 6
Rugged Ultra-Lite Carrier
CCG011 / CCG012
Users Guide

Connect Tech Inc.
42 Arrow Road
Guelph, Ontario
N1K 1S6

Tel: 519-836-1291
Toll: 800-426-8979 (North America only)
Fax: 519-836-4878
Email: sales@connecttech.com
support@connecttech.com
Web: www.connecttech.com

CTIM-00121 Revision:0.10, 08/19/2015

Table of Contents

Customer Support Overview 4
Contact Information 4
Limited Lifetime Warranty 5
Copyright Notice 5
Trademark Acknowledgment 5
Revision History 6
Introduction 6
ESD Warning 6
Product Features and Specifications 7
Part Numbers / Ordering Information 7
Block Diagram 8
Connector Locations 9
CCG011 - Top View 9
CCG012 - Top View 9
Bottom View 10
Jumper and Connector Summary 10
Detailed Feature Pinouts and Descriptions 11
COM Express Module Connector [P1] 11
DisplayPort ++ Video [P2A,P2B] 12
HDMI / DVI / VGA from DisplayPort++ 12
CCG011 - USB 2.0 Ports [P3A,P3B] 13
CCG012 - USB 3.0 Ports [P3A,P3B] 14
MicroSD Card [P4] 15
Input Power [P5] 16
Asynchronous Serial Ports [P8, P10] 17
Software Support for the Exar 17V358 17
Serial Connector RS-232 17
Serial Connector RS-422/485 18
RS485 Control Jumpers 18
GPIO and Console Serial Port [P9] 19
VGA Video [P11] 20
miniPCIe & mSATA Slots [P12A, P12B] 21
Dual Function miniPCIe mSATA Slots 21
Half and Full Length mini PCIe / mSATA module Installation 21
LVDS Video [P13] 23
External SATA Ports [P17A,P17B] 24
CPU Fan [P18] 25
Miscellaneous Control [P19] 25
SIM Socket [P20] 26
Audio Interface [P21] 27
Software Support for the CS4207 27
USB 2.0 Ports [P22] 28

10/100/1000 Ethernet (GBE) [P24A, P24B] 29
Software Support for the Intel 82574 29
Multifunction Jumper Block 30
Typical Hardware Installation for +12V power input 31
Current Consumption Details 32
PCI Express Allocation Details 33
USB Allocation Details 33
Mechanical Details 34
Cables and Cable Kit Information 36
CBG104 – Dual USB 2.0 (8-pin version) 37
CBG116 – System Misc , Un-terminated 38
CBG117 – RJ45 Ethernet 39
CBG118 – Audio 40
CBG120 - VGA 41
CBG121 – Dual DB-9 Serial 42
CBG113 – Display Port 43
CBG130 – Dual USB 2.0 (20-pin version) 44
CBG131 – Internal USB.30 19-Pin Cable 45
CBG125 – LVDS Unterminated Cable 46
CBG90 – SATA + JST Power Cable 47
Appendix A – COM Express Signal/Pinout Connection Details 48

Customer Support Overview

If you experience difficulties after reading the manual and/or using the product, contact the Connect Tech reseller from which you purchased the product. In most cases the reseller can help you with product installation and difficulties.

In the event that the reseller is unable to resolve your problem, our highly qualified support staff can assist you. Our support section is available 24 hours a day, 7 days a week on our website at: www.connecttech.com/sub/support/support.asp. See the contact information section below for more information on how to contact us directly. Our technical support is always free.

Contact Information

Mail/Courier
Connect Tech Inc.
Technical Support
42 Arrow Road
Guelph, Ontario
Canada N1K 1S6

Email/Internet

sales@connecttech.com
support@connecttech.com
www.connecttech.com

Note:
Please go to the **Download Zone** or the **Knowledge Database** in the **Support Center** on the Connect Tech website for product manuals, installation guides, device driver software and technical tips. Submit your technical support questions to our customer support engineers via the **Support Center** on the Connect Tech website.

Telephone/Facsimile
Technical Support representatives are ready to answer your call Monday through Friday, from 8:30 a.m. to 5:00 p.m. Eastern Standard Time. Our numbers for calls are:

Toll Free: 800-426-8979 (North America only)
Telephone: 519-836-1291 (Live assistance available 8:30 a.m. to 5:00 p.m. EST, Monday to Friday)
Facsimile: 519-836-4878 (on-line 24 hours)

Limited Lifetime Warranty

Connect Tech Inc. provides a Lifetime Warranty for all Connect Tech Inc. products. Should this product, in Connect Tech Inc.'s opinion, fail to be in good working order during the warranty period, Connect Tech Inc. will, at its option, repair or replace this product at no charge, provided that the product has not been subjected to abuse, misuse, accident, disaster or non-Connect Tech Inc. authorized modification or repair.

You may obtain warranty service by delivering this product to an authorized Connect Tech Inc. business partner or to Connect Tech Inc. along with proof of purchase. Product returned to Connect Tech Inc. must be pre-authorized by Connect Tech Inc. with an RMA (Return Material Authorization) number marked on the outside of the package and sent prepaid, insured and packaged for safe shipment. Connect Tech Inc. will return this product by prepaid ground shipment service.

The Connect Tech Inc. Lifetime Warranty is defined as the serviceable life of the product. This is defined as the period during which all components are available. Should the product prove to be irreparable, Connect Tech Inc. reserves the right to substitute an equivalent product if available or to retract Lifetime Warranty if no replacement is available.

The above warranty is the only warranty authorized by Connect Tech Inc. Under no circumstances will Connect Tech Inc. be liable in any way for any damages, including any lost profits, lost savings or other incidental or consequential damages arising out of the use of, or inability to use, such product.

Copyright Notice

The information contained in this document is subject to change without notice. Connect Tech Inc. shall not be liable for errors contained herein or for incidental consequential damages in connection with the furnishing, performance, or use of this material. This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated to another language without the prior written consent of Connect Tech, Inc.

Copyright © 2015 by Connect Tech, Inc.

Trademark Acknowledgment

Connect Tech, Inc. acknowledges all trademarks, registered trademarks and/or copyrights referred to in this document as the property of their respective owners. Not listing all possible trademarks or copyright acknowledgments does not constitute a lack of acknowledgment to the rightful owners of the trademarks and copyrights mentioned in this document.

Revision History

Revision	Date	Changes
0.00	09/11/2013	Preliminary Release
0.01	11/27/2013	Updated Cable Drawings and Listings
0.02	12/09/2013	Added CCG011 and CCG012 part info
0.03	12/20/2013	Further Cable Drawing Updates
0.04	02/03/2014	Added PCIe Allocations, Mech Drawings, and updated Cable PN info
0.05	02/18/2014	Correct GBE Cable Drawing (CBG117)
0.06	06/19/2014	Added Appendix A – COM Express Signal/Pinout Connection Details
0.07	08/11/2014	Updated GPIO Pinout Table on pg.41
0.08	09/03/2014	Correct Typos in DisplayPort and Power Input connector sections Updated GBE connector section
0.09	03/23/2015	Added 2D Mechanical Plan View Drawing, Added MTBF data, Updated CBG117 Drawing
0.10	08/19/2015	Correct DisplayPort++ Connector Pinout for AUX signals

Introduction

Connect Tech's COM Express® Type 6 Rugged Ultra Lite Carrier Board is a compact carrier board which matches the dimensions of a COM Express® Basic module and offers the ultimate durability with locking, rugged pin headers.

COM Express® Type 6 Rugged Ultra Lite Carrier Board is ideal for space constrained applications, harsh environments, demanding conditions and supports extended temperature ranges of -40°C to +85°C.

ESD Warning

Electronic components and circuits are sensitive to ElectroStatic Discharge (ESD). When handling any circuit board assemblies including Connect Tech COM Express carrier assemblies, it is recommended that ESD safety precautions be observed. ESD safe best practices include, but are not limited to:

- Leaving circuit boards in their antistatic packaging until they are ready to be installed.
- Using a grounded wrist strap when handling circuit boards, at a minimum you should touch a grounded metal object to dissipate any static charge that may be present on you.
- Only handling circuit boards in ESD safe areas, which may include ESD floor and table mats, wrist strap stations and ESD safe lab coats.
- Avoiding handling circuit boards in carpeted areas.
- Try to handle the board by the edges, avoiding contact with components.

Product Features and Specifications

Specifications	
Compatibility	COM Express Type 6 Modules PICMG COM Express® COM.0 R2.0
Mini PCIe Expansion	2 x half or full length cards Both sockets have PCIe, USB and SATA signaling for mSATA operation 1 x SIM Card Expansion
Storage	4 x SATA ports: 2 x mSATA 2 x External Vertical Locking Connector
Network	2 x Gigabit Ethernet (10/10/1000) Ports 1 from COM Express 1 from on-board Intel 82574I PHY/Controller
GPIO	8-bit GPIO
USB	4 x USB 3.0 Ports (available only on the CCG012 model) 8 x USB 2.0 Ports (2 used for miniPCIe)
Display	2 x DisplayPort++ (DDI) interface Which can be used for DisplayPort, HDMI, DVI or VGA 1 x VGA (Analog/CRT) 1 x LVDS interface (single ch 24-bit, dual ch 48-bit)
Audio	HD Audio (Cirrus Logic CS4207 codec) 1 x stereo input 1 x stereo output
Serial	1 x Console RS-232 port (TX/RX) 2 x RS-232 (w/ full modem signals) 2 x RS-422/485
Misc External Interfaces	SMBus I2C Battery Low Indication PC speaker Interface System Status (S3 and Reset Outputs)
Power	Input: Single +12V input +/- 5% (5mm pitch terminal connector) On-board RTC Battery 3V 48mAh (with option to select from RTC external battery)
I/O Connectors	All low-profile shrouded **locking** ruggedized 2mm pitch headers. Can be mated to panel mountable cable set or MIL type connectors.
Detailed Mechanical Information	125mm x 95mm (x-y dims) Tallest top side component: 12mm **Download 3D model here**
Weight	96g
MTBF / FR	717128hrs / 1394 FITs
Operating Temperature	-40°C to +85°C
Warranty and Support	Lifetime Warranty and Free Technical Support

Part Numbers / Ordering Information

Part Number	
CCG011	USB 2.0 Only Model *(Lower overall mated cable assembly heights)*
CCG012	USB 3.0 Model

Block Diagram

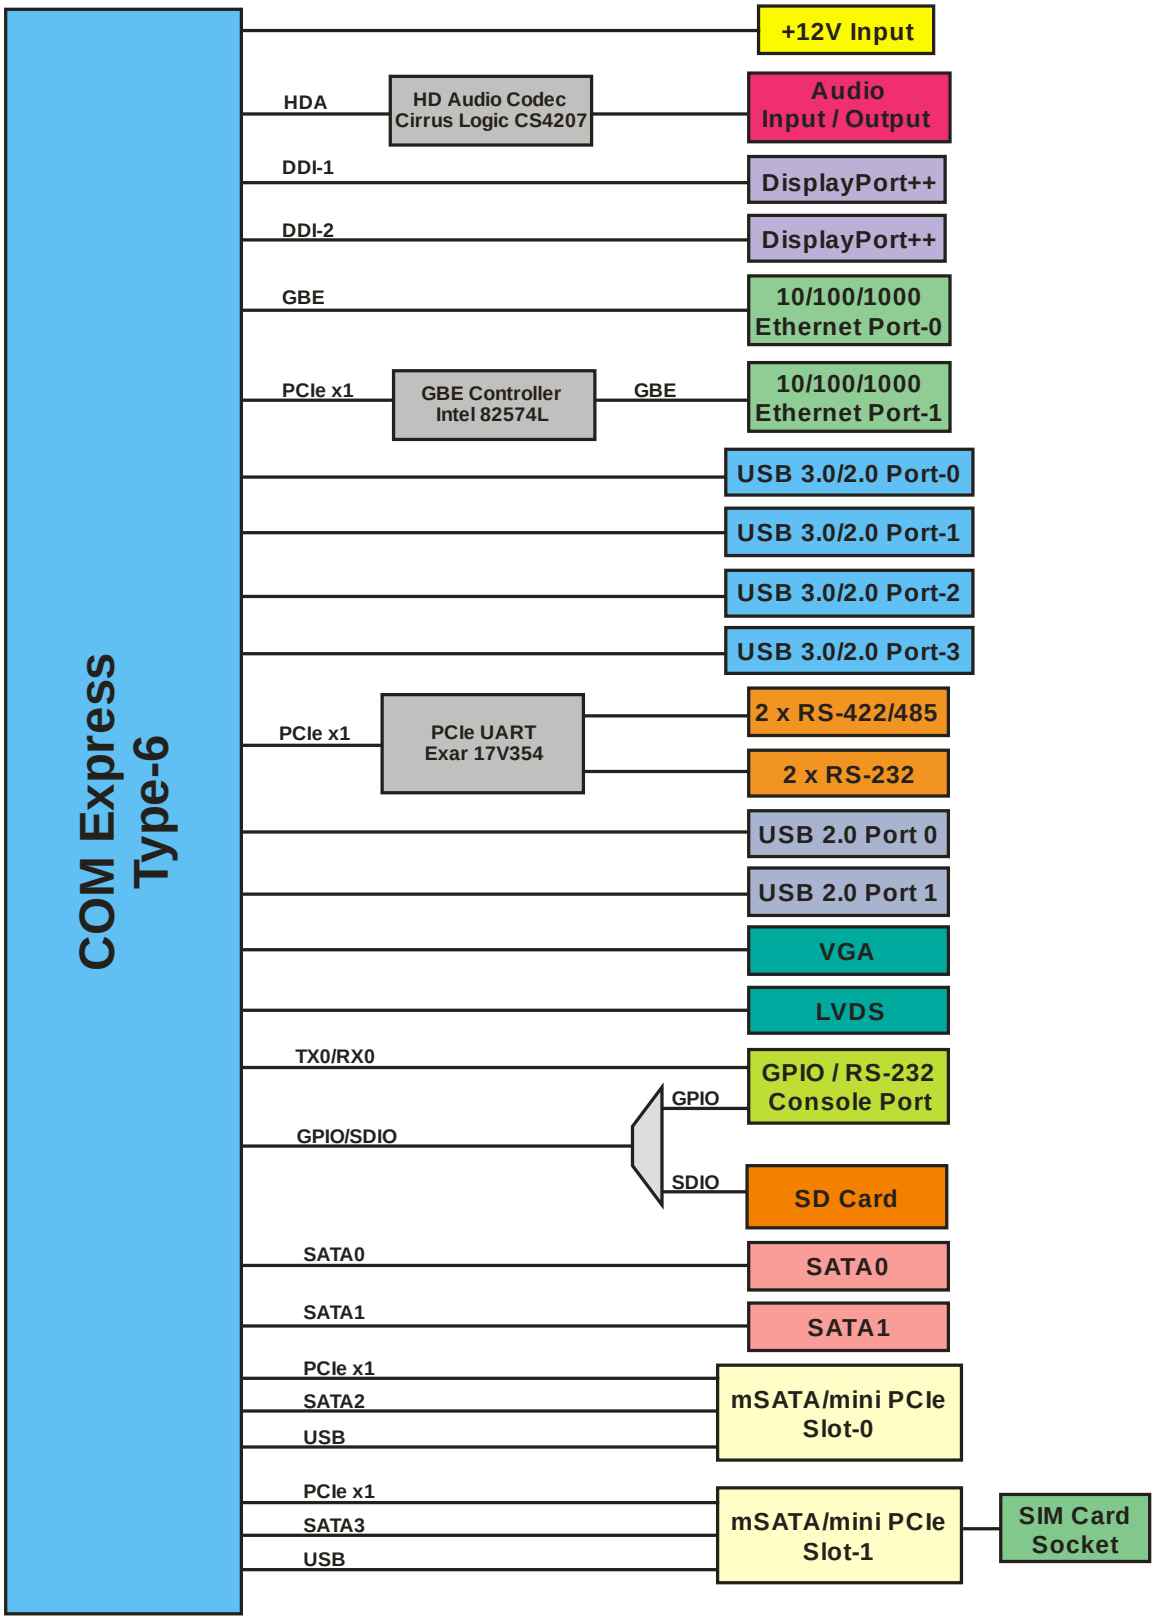

Connector Locations

CCG011 - Top View

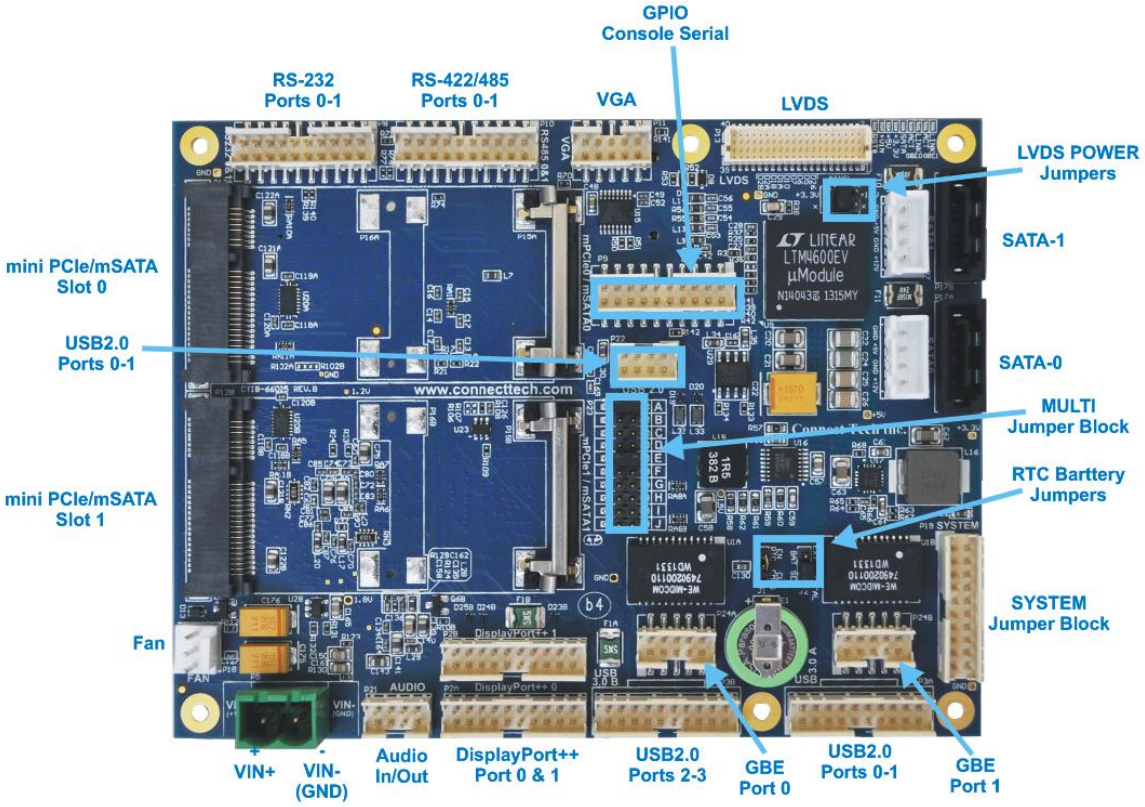

CCG012 - Top View

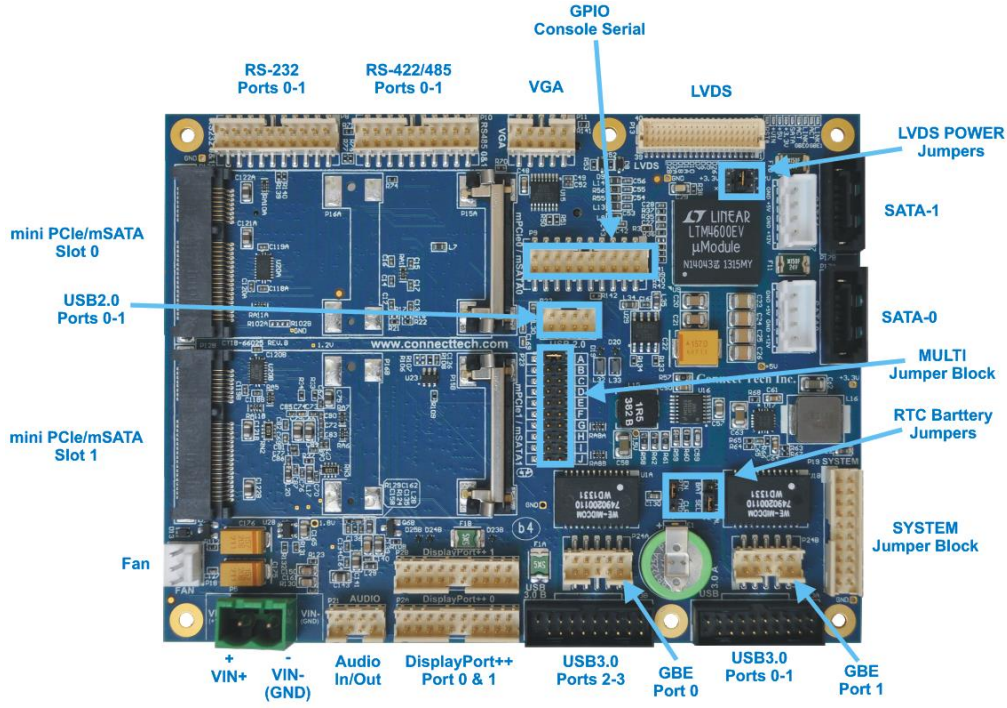

Bottom View

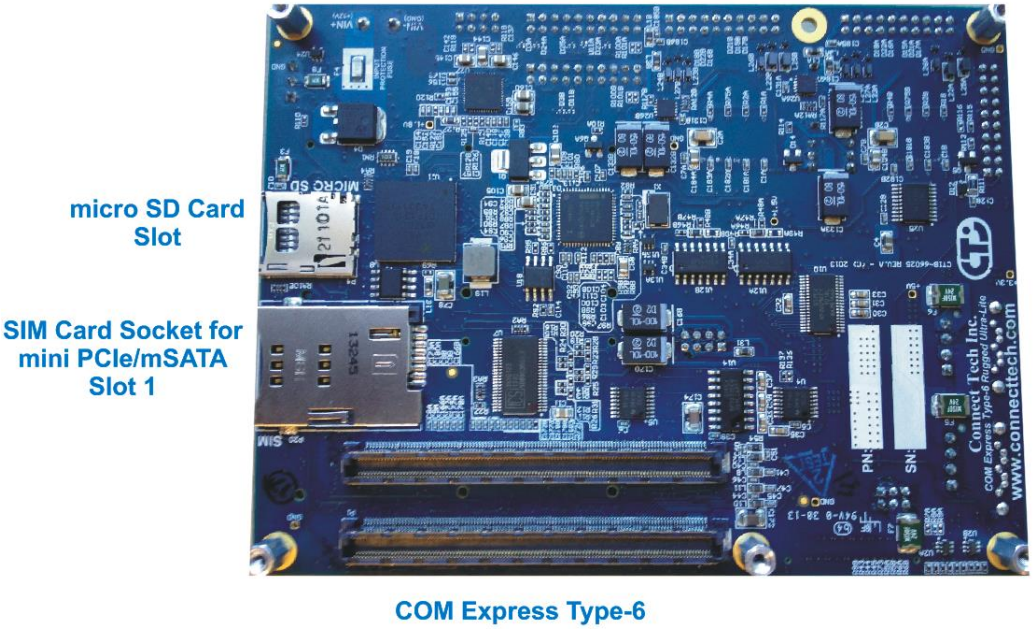

Jumper and Connector Summary

Designator	Description
P1	COM Express Connector,
P2A P2B	Display Port
P3A P3B	USB 3.0 Ports 0,1 USB 3.0 Ports 2,3
P4	Micro SD card.
P5	+12VDC Power In
P6, P7	SATA Power
P8	RS232 Ports 1&2
P9	GPIO and COM Express Type 6 simple serial
P10	RS485 Ports 3&4
P11	VGA
P12A, P12B	Dual mode MiniPCIe / mSATA
P13	LVDS
P14	-
P15,P16	Mini PCIe Retention Latches
P17A, P17B	SATA Signal Ports 1&2
P18	CPU FAN Power
P19	Reset, #S3, I2C, Power Button Misc
P20	Mini SIM card connector
P21	Stereo Audio In and Out
P22	2 x USB2.0 Internal Connector
P23	Misc Controls

Detailed Feature Pinouts and Descriptions

COM Express Module Connector [P1]

The processor and chipset are implemented on the COM Express Type 6 CPU module, which connects to the COM Express carrier via a Tyco fine pitch stacking connector.

Function	**COM Express interface**
Location	P1
Type	Tyco fine pitch stacking connector, part number: 3-5353652-6 8mm stack height.
Pinout	Refer to COM Express R2.0 specification, Type-6.

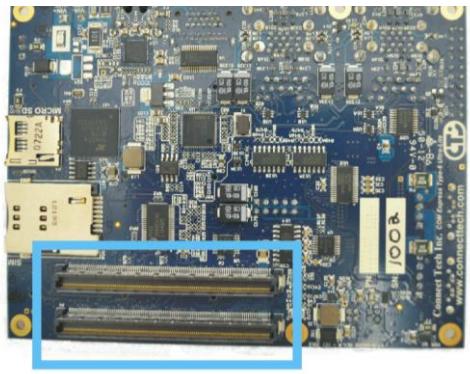

Note: 8mm standoffs are required to mount COM Express module.

DisplayPort ++ Video [P2A,P2B]

The *COM Express Type 6 Rugged Ultra-Lite Carrier* features two DisplayPort++ connectors. This can be configured to output DisplayPort, HDMI/DVI or even VGA through the use of a dongle.

The configuration of each interface is setup via the COM Express module's BIOS settings. Refer to the COM Express module's documentation for more details.

Function	DisplayPort++ Video Output Connectors
Location	P2A, P2B
Type	FCI 98414-G06-20LF, 2x10 2mm
Cable	CBG113

Pinout

Pin	Description	Pin	Description
1	DP0+	2	DP3+
3	DP0-	4	DP3-
5	GND	6	GND
7	DP1+	8	DPAUX-
9	DP1-	10	DPAUX+
11	GND	12	GND
13	DP2+	14	DP Hot Plug Detect
15	DP2-	16	GND
17	GND	18	GND
19	DP Power	20	DP AUX SEL [1]

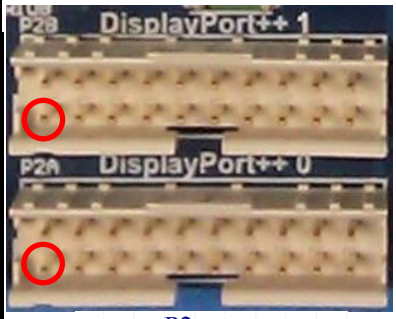

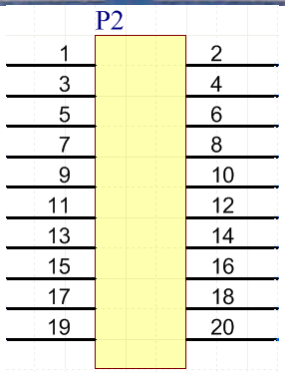

*[1] – For **DP_AUX_SEL** – Cable assembly must tie high (+3.3V) for HDMI/DVI output and low (GND) for DisplayPort output.*

HDMI / DVI / VGA from DisplayPort++

The *COM Express Type 10 Mini Carrier*'s DisplayPort++ connector can be used for display outputs other than DisplayPort. The use of HDMI, DVI or VGA can be done through a simple dongle or cable assembly like the ones shown below. These can be purchased from any OEM vendor (such as www.startech.com) or directly through Connect Tech.

CCG011 - USB 2.0 Ports [P3A,P3B]

The CCG011 board houses 4 x USB 2.0 ports on 20-pin headers and 2 x USB 2.0 ports on 8-pin headers. Below is a description of the 20-pin USB 2.0 headers on the CCG011 carrier.

Function	**Dual, USB 2.0**
Locations	P3A, P3B
Type	FCI 98414-G06-20LF, 2x10 2mm
Cable	CBG130

Pinout

Pin	Description	Pin	Description
1	PORT A, VBUS	2	-
3	-	4	PORT B, VBUS
5	-	6	-
7	PORT A, GND	8	-
9	-	10	PORT B, GND
11	-	12	-
13	PORT A, GND	14	-
15	PORT A, D-	16	PORT B, GND
17	PORT A, D+	18	PORT B, D-
19	-	20	PORT B, D+

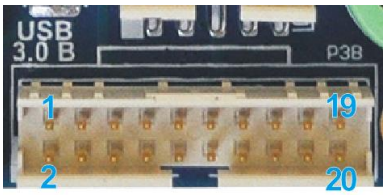

CCG012 - USB 3.0 Ports [P3A,P3B]

The CCG012 carrier implements four USB 3.0 connections via two 19-pin Locking Intel Motherboard style USB connectors. Over current protection, power supply filtering and ESD protection is provided.

Each USB 3.0 port is capable of bitrates of up to 5Gbps, as well as accepting USB2.0 and below connections.

Function	**Dual, USB 3.0**
Locations	P3A, P3B
Type	Intel Locking Motherboard Style 19-pin USB3.0 connector
Cable	CBG131 (Or any Standard USB 3.0 "Internal" 19-pin Motherboard Cable.) http://www.intel.com/content/www/us/en/io/universal-serial-bus/usb3-internal-connector-cable-specification.html

Pinout

Pin	Description	Pin	Description
-	-	1	P1-VBUS
19	P2-VBUS	2	P1-SSRX-
18	P2-SSRX-	3	P1-SSRX+
17	P2-SSRX+	4	GND
16	GND	5	P1-SSTX-
15	P2-SSTX-	6	P1-SSTX+
14	P2-SSTX+	7	GND
13	GND	8	P1-D-
12	P2-D-	9	P1-D+
11	P2-D+	10	-

MicroSD Card [P4]

The COM Express Ultra-Lite carrier provides a Micro SD Card Slot at P4. This Micro SD Card slot sources the SDIO interface from the COM Express modules GPIO pins.

** Note this SD card slot will ONLY operate if the COM Express module provides the SDIO interface over the GPIO pins. See below for the SDIO / GPIO mapping **

Also ensure **MULTI-JUMPER position "B"** is installed to select the SDIO interface.

Function	Micro SD Card Slot
Locations	P4
Type	Micro SD Card Socket Molex 502570-0893
Pinout	

Pin	SDIO Signal	COM Express GPIO Mapping
1	SD_D2	GPI2
2	SD_D3	GPI3
3	SD_CMD	GPO1
4	SD_VCC (+3.3V)	-
5	SD_CLK	GPO0
6	GND	-
7	SD_D0	GPI0
8	SD_D1	GPI1
9	GND	-
10	SD_CD#	GP03

micro SD Card Slot

Input Power [P5]

The COM Express carrier is designed to be powered from a regulated single +12V power supply. The carrier board features a 5mm screw terminal style connector. The COM Express carrier generates all of the necessary voltages on board from this single input.

A Panasonic BR1225A/FA Lithium battery provides the VBAT for the RTC Clock of the COM Express module.

<table>
<tr><td>Function</td><td>Main Input Power</td><td rowspan="5"> 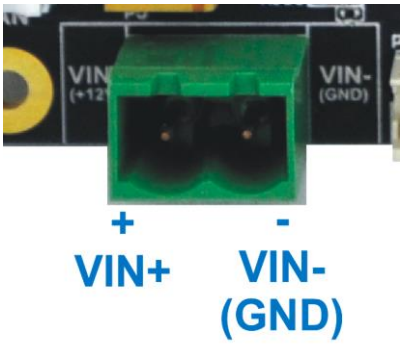
</td></tr>
<tr><td>Location</td><td>P5</td></tr>
<tr><td>Range</td><td>11.4 VDC to 12.6 VDC (+/-5%). Recommend no less than 12VDC at terminal block input.</td></tr>
<tr><td>Type</td><td>2 Position 5mm pitch terminal connector

Mating Connector:
PN: 796634-2
MFG: TE Connectivity</td></tr>
<tr><td>Fuse</td><td>+12V is protected with a one-time 10A fuse, at F4.</td></tr>
<tr><td>Pinout</td><td>
<table>
<tr><th>Pin</th><th>Signal</th><th>Description</th></tr>
<tr><td>1</td><td>+12V</td><td>Power In</td></tr>
<tr><td>2</td><td>GND</td><td>Power Return</td></tr>
</table>
*DO NOT REVERSE POLARITY!
</td></tr>
</table>

Asynchronous Serial Ports [P8, P10]

The COM Express Ultra-Lite carrier features four "external" serials ports. Port1 and Port2 are standard RS-232 and Port3 and Port4 can be configured as RS-422/485. These serial ports are generated from on-board PCIe 4-port UART the Exar 17V358 (Connect Tech's BlueStorm/Express Circuitry).

Software Support for the Exar 17V358

Additional drivers will be needed to properly operate the 4 additional serial ports on the COM Express carrier. Drivers for this functionality can be found on Connect Tech's download zone here: http://www.connecttech.com/asp/Support/DownloadZone_results.asp?Product=3&OperatingSystem=IS+NOT+NULL&x=16&y=13

Serial Connector RS-232

Function	RS232 Serial
Location	P8
Type	FCI 98424-G52-20LF, 2x10 2mm
Cable	CBG121

Pinout

Pin	Description	Pin	Description
1	Port A, DCD	2	Port A, DSR
3	Port A, RXD	4	Port A, RTS
5	Port A, TXD	6	Port A, CTS
7	Port A, DTR	8	Port A, RI
9	GND	10	-
11	Port B, DCD	12	Port B,DSR
13	Port B,RXD	14	Port B,RTS
15	Port B,TXD	16	Port B,CTS
17	Port B,DTR	18	Port B,RI
19	GND	20	-

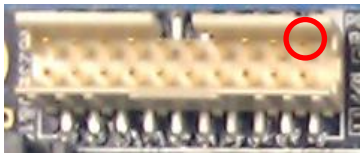

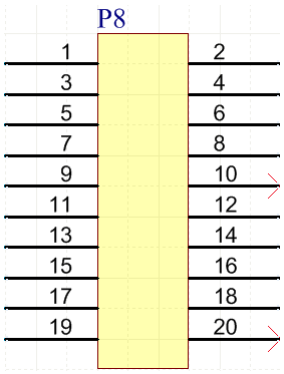

Serial Connector RS-422/485

Function	**RS485 Serial**
Location	**P10**
Type	FCI 98424-G52-20LF, 2x10 2mm
Pinout	

Pin	Description
1	Port A, RXD+
3	Port A, TXD+
5	Port A, TXD-
7	Port A, RXD-
9	GND
11	Port B,RXD+
13	Port B,TXD+
15	Port B,TXD-
17	Port B,RXD-
19	GND

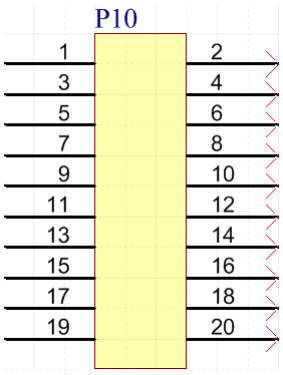

RS485 Control Jumpers

The RS485 Control Jumpers are used for implementing the following RS485 modes of operations:

- ½ Duplex Multidrop
- Full Duplex Multidrop

The UART RTS signals can used for TX/RX control and can be enable via the MULTI jumper block. See below for the RS-422/485 circuit diagram.

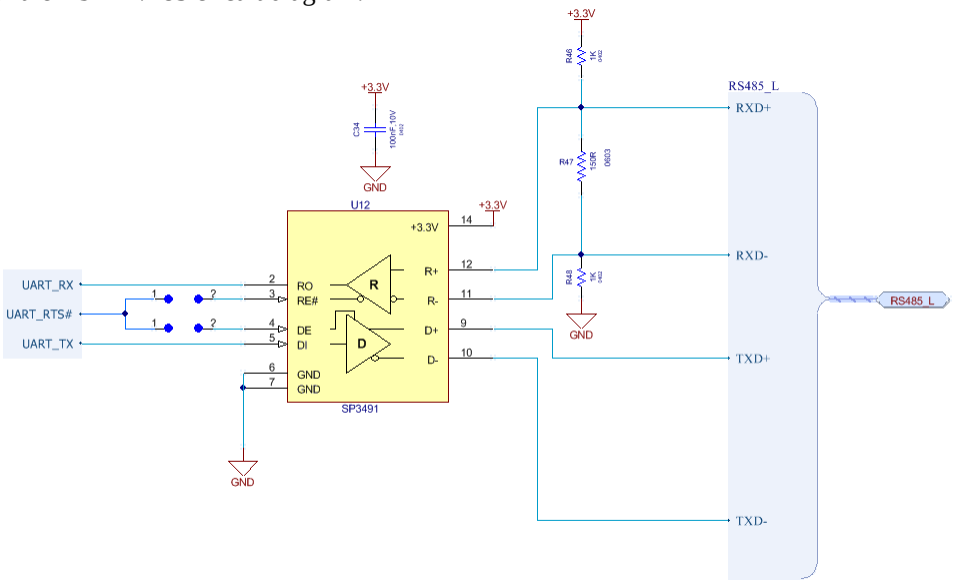

sample circuit shown (not exact circuit that is on-board)

GPIO and Console Serial Port [P9]

The COM Express Ultra-Lite carrier provides additional functionality of COM Express Type-6 specification.

Function	**Console RS-232 / GPIO**
Locations	P9
Type	FCI 98424-G52-20LF
Cable	CBG121

Pinout

Pin	Description	Pin	Description
1	GPIO Input 0	2	GPIO Output 3
3	GPIO Input 1	4	GPIO Output 2
5	GPIO Input 2	6	GPIO Output 1
7	GPIO Input 3	8	GPIO Output 0
9	GND	10	-
11	-	12	-
13	RS-232 RX	14	-
15	RS-232 TX	16	-
17	-	18	-
19	GND	20	-

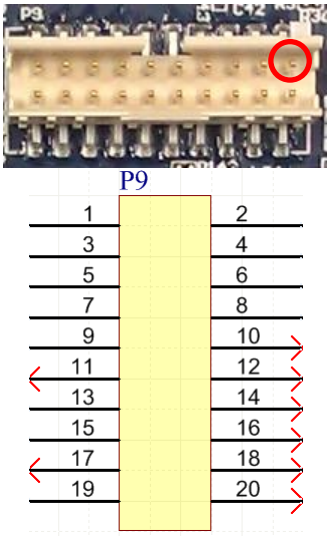

VGA Video [P11]

Function	Standard VGA
Location	P11
Type	FCI 98424-G52-10LF, 2x5 2mm header
Cable	CBG120
Pinout	

Pin	Description	Pin	Description
1	Red	2	GND
3	Green	4	-
5	Blue	6	SC DDC
7	HSYNC	8	SD DDC
9	VSYNC	10	GND



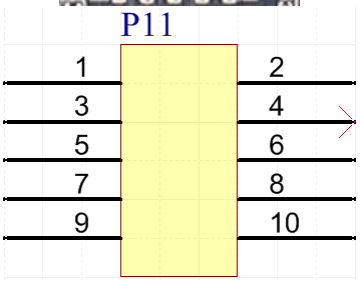

miniPCIe & mSATA Slots [P12A, P12B]

Dual Function miniPCIe mSATA Slots

The COM Express Ultra-Lite has two special dual purpose functionality mini PCIe / mSATA slots. Each of these slots can accept either a mini PCIe module or a mSATA SSD module. These slots have special circuitry that allows for the selection between connecting PCIe lanes or SATA lanes.

Each of these slots are also provided with a USB 2.0 in addition to the PCIe as per the mini PCIe specification, see below for a block diagram of the slots functionality.

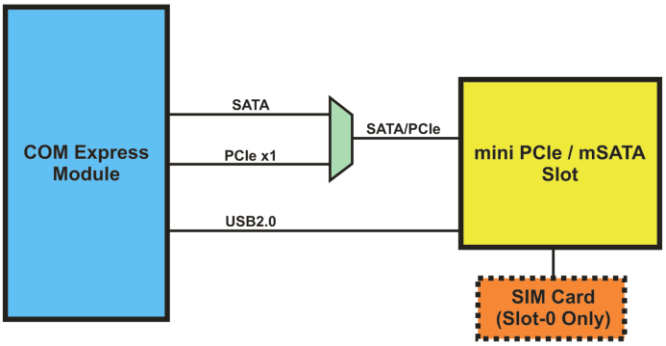

PCIe / SATA Dual Functionality Diagram

Selection between mSATA and miniPCIe is done on the MULTI-JUMPER block (P23)

Position	Jumper ON	Jumper OFF
C	Slot-0 miniPCIe selected	Slot-0 mSATA selected
D	Slot-1 miniPCIe selected	Slot-1 mSATA selected

Half and Full Length mini PCIe / mSATA module Installation

The COM Express Ultra-Lite come populated by default with its latches in the full length position. If you wish install a half-length module you must use a half-to-full length bracket like shown below. If you would prefer to have a slot or both populated with half at the time of your production order please contact sales@connecttech.com for further details.

Function	**mini PCIe / mSATA Slots**	
Locations	**P12A, P12B**	
Type	Standard miniPCIe Slots	

Pinout

mSATA Pinout

Pin Number	Description
1	NC
2	+3.3V
3	NC
4	GND
5	NC
6	+1.5V
7	NC
8	NC
9	GND
10	NC
11	NC
12	NC
13	NC
14	NC
15	GND
16	NC
17	NC
18	GND
19	NC
20	NC
21	RESV
22	NC
23	SATA TX+ To Host System
24	+3.3V
25	SATA TX- To Host System
26	GND
27	GND
28	+1.5V
29	GND
30	NC
31	SATA RX- From Host System
32	NC
33	SATA RX+ From Host System
34	GND
35	GND
36	NC
37	GND
38	NC
39	+3.3V
40	GND
41	+3.3V
42	NC
43	RESV
44	NC
45	NC
46	NC
47	NC
48	+1.5V
49	NC
50	GND
51	NC
52	+3.3V

miniPCIe Pinout

Pin Number	Description
1	NC
2	+3.3V
3	NC
4	GND
5	NC
6	+1.5V
7	CLKREQ#
8	UIM_PWR
9	GND
10	UIM_DATA
11	PCIe CLK+
12	UIM_CLK
13	PCIe CLK-
14	UIM_RESET
15	GND
16	UIM_VPP
17	NC
18	GND
19	NC
20	W_DISABLE#
21	RESV
22	NC
23	PCIe RX+ To Host System
24	+3.3V
25	PCIe RX- To Host System
26	GND
27	GND
28	+1.5V
29	GND
30	SMB_CLK
31	PCIe TX- From Host System
32	SMB_DATA
33	PCIe TX+ From Host System
34	GND
35	GND
36	USB D-
37	GND
38	USB D+
39	+3.3V
40	GND
41	+3.3V
42	NC
43	RESV
44	NC
45	NC
46	NC
47	NC
48	+1.5V
49	NC
50	GND
51	NC
52	+3.3V

LVDS Video [P13]

Function	LVDS Video
Location	P11
Type	Hirose DF20G-40DP-1V(56)
Pinout	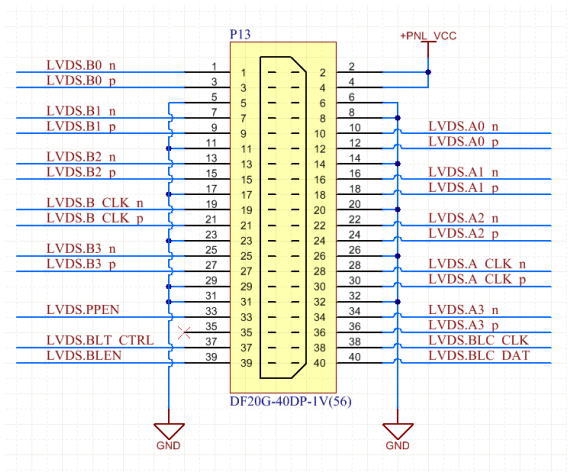

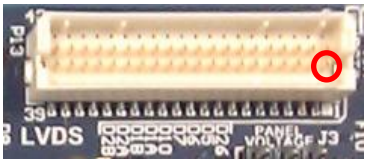

The LVDS Panel VCC voltage is selected via the J3 jumper block. The current is limited to 1.5A

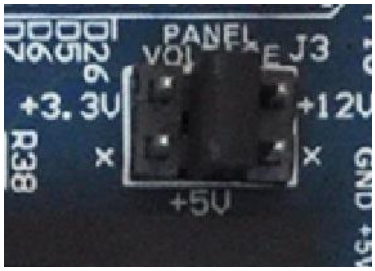

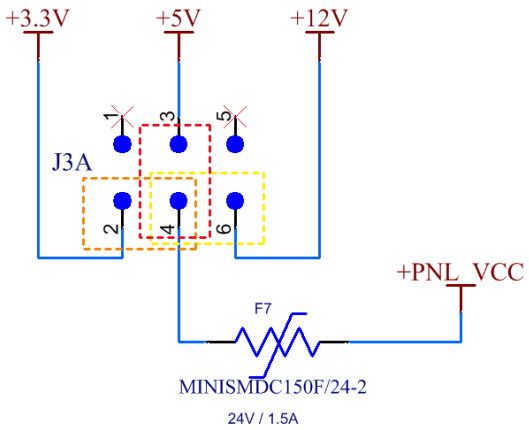

Jumper Selectable LVDS Panel Voltage

User can select between +3.3V, +5V and +12V.

Jumper 2-4 = +3.3V
Jumper 3-4 = +5V
Jumper 5-6 = +12V

External SATA Ports [P17A,P17B]

The COM Express carrier provides two SATA HDD connections as well as external power connectors for each drive.

Function	**SATA host**
Locations	P17A – SATA – 0 P17B – SATA - 1
Type	Industry standard vertical entry SATA host connector with locking.
Cable	CBG090
Pinout	

Pin	Description
1	GND
2	SATA_TX_P
3	SATA_TX_N
4	GND
5	SATA_RX_N
6	SATA_RX_P
7	GND

Function	**SATA HDD Power**
Locations	P6, P7
Carrier Connector PN	B4B-XH-AM(LF)(SN)(P) Manufacturer: JST
Mating Connector PN	XHP-4 Manufacturer: JST
Mating CTI Cable PN	CBG090
Pinout	

Pin	Description
1	GND (Black)
2	+5V (Red)
3	GND (Black)
4	+12V (Yellow)

+12V and +5V are protected with 1200mA Raychem Poly fuses.

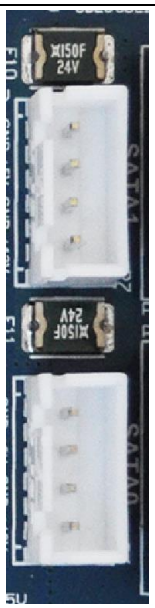

Note: The SATA power connectors are fused independently from the main +12V fuse that provides +12V power to the board, i.e. the SATA power connectors are not double fused.

CPU Fan [P18]

Function	Fan Power
Location	P18
Type	Molex 22-23-2031
Pinout	

Pin	Signal
1	Fan Tach
2	+V
3	GND

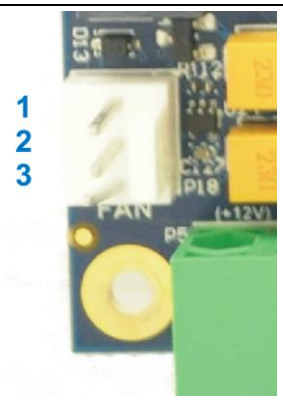

Miscellaneous Control [P19]

This misc header can be used to connect power button, reset button, PC speaker, I2C device and monitor other power rails. Aswell it provides the option of jumpering the +5V rail to the +5VSB rail which may be needed by some modules.

Function	Miscellaneous Control Header
Location	P19
Type	FCI 98414-G06-20LF, 2x10 2mm
Cable	CBG116
Pinout	

Pin	Description	Pin	Description
1	+5V	2	Speaker
3	+5V	4	+5VSB
5	Ext CMOS Bat	6	GND
7	System Reset	8	GND
9	Power Button	10	GND
11	Batlow#	12	GND
13	Sus_S3#	14	GND
15	I2C.CLK	16	GND
17	I2C.DAT	18	GND
19	+5V	20	GND

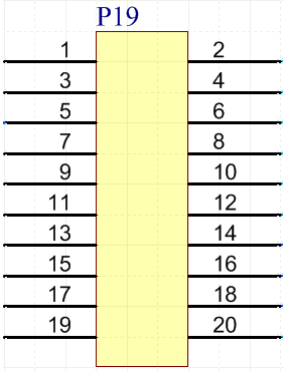

SIM Socket [P20]

Function	SIM Socket	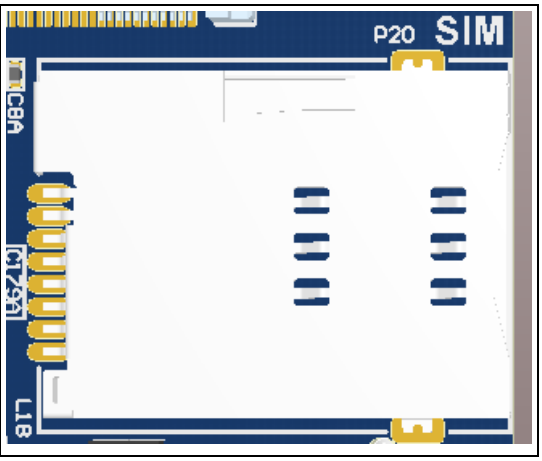
Location	P20	
Type	Molex 0475530001	
Pinout		

Audio Interface [P21]

The *COM Express Type 10 Mini Carrier* features HD Audio capabilities care of the Cirrus Logic CS4207 Codec device. From the codec 1 input (microphone) and 1 output (headphone) are available.

Function	**Audio Connector**
Locations	P21
Type	FCI 98424-G52-10LF
Cable	CBG118

Pinout

Pin	Description	Pin	Description
1	-	2	-
3	Mic R	4	Mic L
5	GND	6	GND
7	Head Phone R	8	Head Phone L



Software Support for the CS4207

The audio codec used on the carrier board is the CS4207 from Cirrus Logic.

Additional drivers will be needed to properly operate audio on the COM Express carrier. Some downloadable links can be found below.

Windows XP Driver: http://www.cirrus.com/en/pubs/software/CS4207_WinXP_1-0-0-38.zip
Windows 7/Vista Driver: http://www.cirrus.com/en/pubs/software/CS4207_WinVista_Win7_32-64-bit_6-6001-1-30.zip
Linux Driver: Included in kernels 2.6.30 and up.

USB 2.0 Ports [P22]

The *COM Express Type 10 Mini Carrier* has 6 external USB 2.0 ports. Each of these are directly sourced from the COM Express Type 10 module and do not go through any external hubs or bridges.

Function	**USB 2.0**
Locations	P22
Type	FCI 98414-G06-08LF, 2x4 2mm
Cable	CBG104
Pinout	

Pin	Description	Pin	Description
1	Port A-VBUS	2	Port B-VBUS [1]
3	Port A-D-	4	Port B-D-
5	Port A-D+	6	Port B-D+
7	Port A-GND	8	Port B-GND



*[1] – **B-VBUS** – This voltage can be disable for USB Client mode on USB port 6, by un-installing jumper J23 position A.*

10/100/1000 Ethernet (GBE) [P24A, P24B]

The COM Express carrier features dual 10/100/1000 Ethernet Ports.
GBE Port 0 is coming from an Intel 82574 PCIe PHY Controller located on the carrier.
GBE Port 1 is coming directly from the COM Express module.

Function	**LAN Connector**
Locations	P24A, P24B
Type	FCI 98424-G52-10LF
Cable	CBG128
Pinout	

Pin	Description	Pin	Description
1	MX1-	2	MX1+
3	MX2-	4	MX2+
5	SHELL	6	SHELL
7	MX3-	8	MX3+
9	MX4-	10	MX4+

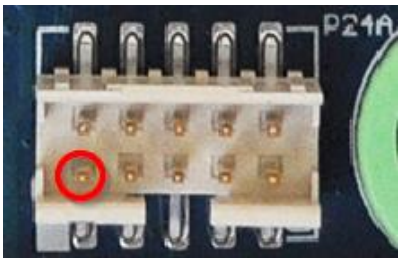

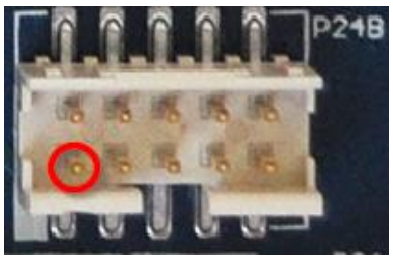

Software Support for the Intel 82574

Additional drivers will be needed to properly operate the GBE Port 0 on the COM Express carrier.

These drivers can be downloaded directly from Intel website from the below link:
http://downloadcenter.intel.com/SearchResult.aspx?lang=eng&ProductFamily=Ethernet+Components&ProductLine=Ethernet+Controllers&ProductProduct=Intel%C2%AE+82574+Gigabit+Ethernet+Controller

Multifunction Jumper Block

The COM Express Type-6 Ultra-Lite Carrier has a multi-function jumper that provides control for various interfaces and features. The "MULTI" jumper is located at P23.

Below are the full details of the MULTI jumper block functionality.

Position	Description	JUMPER IN	JUMPER OFF
A	USB Port-7 Client/Host	Port-7 USB Host enabled. Power connected	Port-7 USB Client enabled. Power Disconnected
B	SD Card / GPIO Mux	SD Card Functionality is enabled	GPIO Functionality is enabled
C	mSATA / miniPCIe Slot-0 Selection	miniPCIe enabled	mSATA enabled
D	mSATA / miniPCIe Slot-1 Selection	miniPCIe enabled	mSATA enabled
E	PCIe UART EEPROM	Enable PCIe UART EEPROM	Disable PCIe UART EEPROM
F	PCIe UART - TRI State Enable	Enable TRI-State control for PCIe UART	Disable TRI-State control for PCIe UART
G	PCIe UART - 485 Port 0 - RTS-TX Control	Enable RS-485 Port-0 RTS-TX Control	Disable RS-485 Port-0 RTS-TX Control
H	PCIe UART - 485 Port 0 - RTS-RX Control	Enable RS-485 Port-0 RTS-RX Control	Disable RS-485 Port-0 RTS-RX Control
I	PCIe UART - 485 Port 1 - RTS-TX Control	Enable RS-485 Port-1 RTS-TX Control	Disable RS-485 Port-1 RTS-TX Control
J	PCIe UART - 485 Port 1 - RTS-RX Control	Enable RS-485 Port-1 RTS-RX Control	Disable RS-485 Port-1 RTS-RX Control

Note: Highlighted cell are the recommended default settings

Typical Hardware Installation for +12V power input

1. Ensure all external system power supplies are off.

2. Install the COM Express module into P1. Be sure to follow the manufacturer's direction for proper heatsink/heatspreader installation and any other cooling instructions from the manufacturer.

3. Install the necessary cables for the application. At a minimum, this would include:

   a) +12V Power cable to the input power connector.
   b) Connect a video display cable VGA, HDMI, DisplayPort or LVDS.
   c) Keyboard and mouse via USB
   d) SATA Power and Signal to SATA HDD

   For the relevant cables, see the Cables & Interconnect section of this manual

4. Connect the power cable to power supply

5. Switch on the power supply. DO NOT power up your COM Express system by plugging in live power.

Current Consumption Details

Below are the maximum ratings of the carrier.

Maximums	Amps	Watts
Theoretical absolute maximum total draw of all functionality on the carrier board (this value excludes current draw from module)	4.00 A	48 W
Safety Protected Maximum Current Draw Rating for Module and Carrier (from in-line fuse)	10.00 A	120 W

Below are some examples of actual measurements taken with the COM Express Ultra-Lite Carrier running in various test setups. Some values will change depending on what COM Express module is installed, please refer to the module manufactures manual for full details on the current consumption of the particular module you are using.

Actual Measurements	Amps	Watts
Carrier standalone no module installed, powered ON, with no loads	0.16 A	1.92 W
Module Installed[1], single DDI video output, USB keyboard with system sitting in BIOS	1.29 A	15.48 W
Module Installed[1], single DDI video output, USB keyboard, booted Linux running CPU stress test	2.60 A	31.20 W
Module Installed[1], dual DDI video output, 4 x USB 3.0 devices installed, 2 x USB2.0 devices installed, mSATA installed, miniPCIe installed, audio in/out running, dual GBE running and CPU stress test	3.10 A	37.2 W

Note [1] : COM Express Type-6 Module used for measurements - Intel Core i5 Ivy Bridge 2700MHz Quad- Core Processor with QM77 chipset.

PCI Express Allocation Details

Below is a listing of how the PCI Express Links are allocated on the carrier board.

COM Express PCI Express Link	Peripheral Connection
PCIe x1 - 0	PCIe UART (Exar 17V354)
PCIe x1 - 1	miniPCIe / mSATA Slot 0
PCIe x1 - 2	miniPCIe / mSATA Slot 1
PCIe x1 - 3	PCIe GBE PHY (Intel 82574)
PCIe x1 - 4	No Connect
PCIe x1 - 5	No Connect
PCIe x1 - 6	No Connect
PCIe x1 - 7	No Connect
PEG /PCIe x16	No Connect

USB Allocation Details

Below is a listing of how the USB Ports are allocated on the carrier board.

COM Express USB Port	Peripheral Connection
USB 3.0 Port 0	USB 3.0 A Connector (P3A)
USB 3.0 Port 1	USB 3.0 A Connector (P3A)
USB 3.0 Port 2	USB 3.0 B Connector (P3B)
USB 3.0 Port 3	USB 3.0 B Connector (P3B)
USB 2.0 Port 0	USB 3.0 A Connector (P3A)
USB 2.0 Port 1	USB 3.0 A Connector (P3A)
USB 2.0 Port 2	USB 3.0 B Connector (P3B)
USB 2.0 Port 3	USB 3.0 B Connector (P3B)
USB 2.0 Port 4	miniPCIe / mSATA Slot 0
USB 2.0 Port 5	miniPCIe / mSATA Slot 1
USB 2.0 Port 6	USB 2.0 Connector (P22)
USB 2.0 Port 7	USB 2.0 Connector (P22)

Mechanical Details

A complete **3D STEP Model** file of carrier board can be downloaded here:
http://www.connecttech.com/ftp/3d_models/CCG011_3D_MODEL.zip

2D Mechanical Top Down Dimensioned Drawing

All dimension are in (mm)

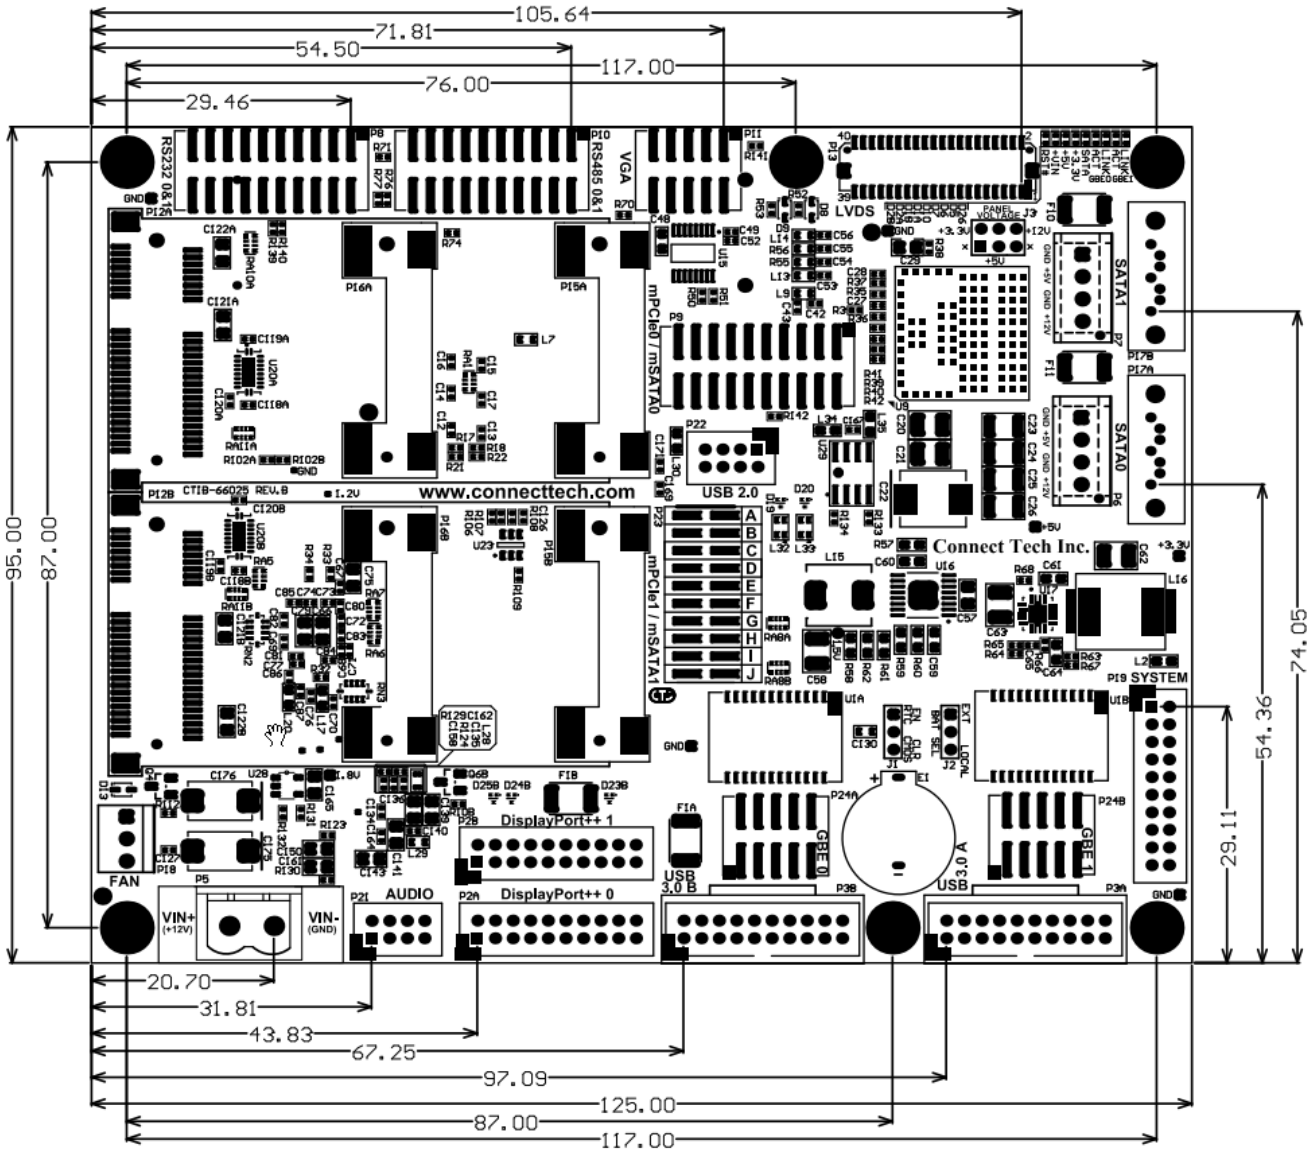

2D Plan View Drawing

This drawing shows the CCG011/12 board mated with a COM Express module with a standard conductive cooled heatplate installed.

All dimensions are in (mm)

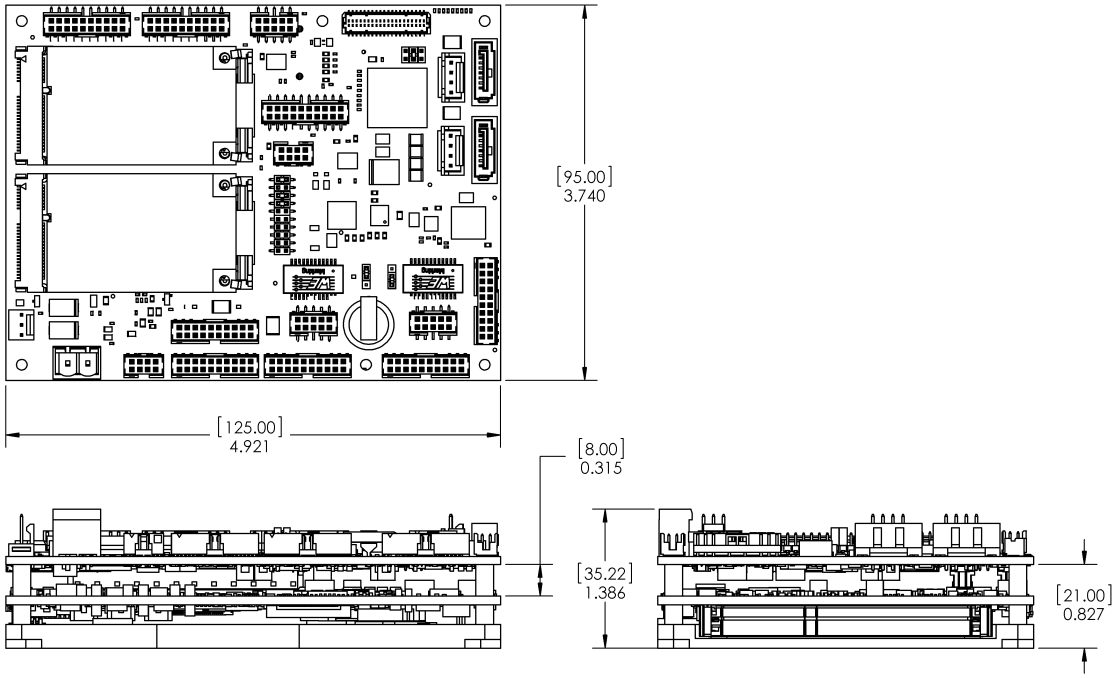

Cables and Cable Kit Information

Drawing No.	Part No.	Description	**CKG020** CCG011 **Full Kit**	**CKG022** CCG012 **Full Kit**	**CKG021** CCG011 / CCG012 **Starter Kit**
CTIC-00347 REV 0.00	CBG090	SATA HDD + Power cable	2	2	1
CTIC-00379 REV 0.00	CBG120	VGA to 10-pin Minitek Cable	1	1	1
CTIC-00380 REV 0.00	CBG121	Dual DB9 to 20-pin Minitek Cable	3	3	-
CTIC-00429 REV 0.00	CBG104	Dual USB 2.0 to 8-Pin Minitek Cable	1	1	1
CTIC-00432 REV 0.00	CBG113	DisplayPort to 20-pin Minitek Cable	2	2	-
CTIC-00433 REV 0.00	CBG117	RJ-45 to 10-pin Minitek Cable	2	2	1
CTIC-00434 REV 0.00	CBG118	Dual Audio to 8-Pin Minitek Cable	1	1	-
CTIC-00435 REV 0.00	CBG116	System-Misc to 20-pin Minitek Cable	1	1	-
CTIC-00488 REV 0.00	CBG130	Dual USB 2.0 to 20-pin Minitek Cable	2	-	-
OEM	CBG131	Dual USB 3.0 to 20-pin Locking Intel Style Header	-	2	-
OEM	CBG125	LVDS, DF20A-40DS to un-terminated wires	-	-	-

CBG104 – Dual USB 2.0 (8-pin version)

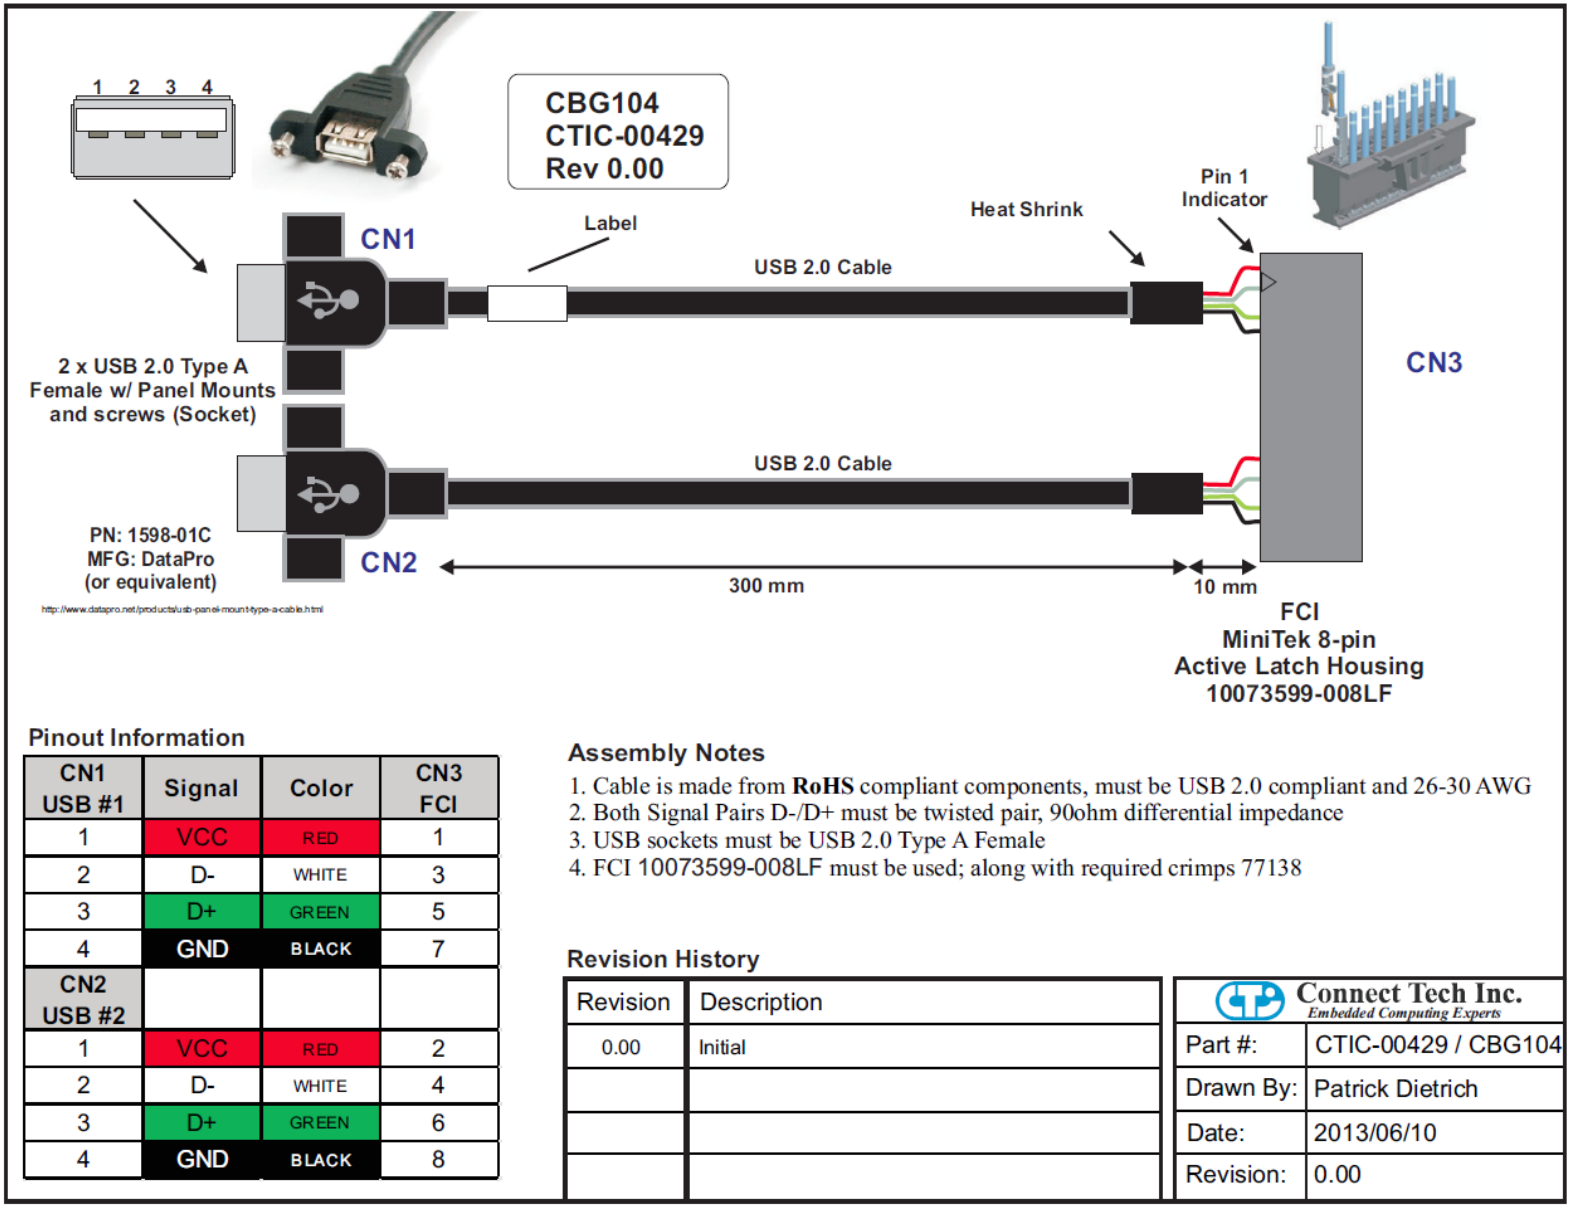

Pinout Information

CN1 USB #1	Signal	Color	CN3 FCI
1	VCC	RED	1
2	D-	WHITE	3
3	D+	GREEN	5
4	GND	BLACK	7
CN2 USB #2			
1	VCC	RED	2
2	D-	WHITE	4
3	D+	GREEN	6
4	GND	BLACK	8

Assembly Notes

1. Cable is made from **RoHS** compliant components, must be USB 2.0 compliant and 26-30 AWG
2. Both Signal Pairs D-/D+ must be twisted pair, 90ohm differential impedance
3. USB sockets must be USB 2.0 Type A Female
4. FCI 10073599-008LF must be used; along with required crimps 77138

Revision History

Revision	Description
0.00	Initial

Connect Tech Inc. Embedded Computing Experts	
Part #:	CTIC-00429 / CBG104
Drawn By:	Patrick Dietrich
Date:	2013/06/10
Revision:	0.00

CBG116 – System Misc , Un-terminated

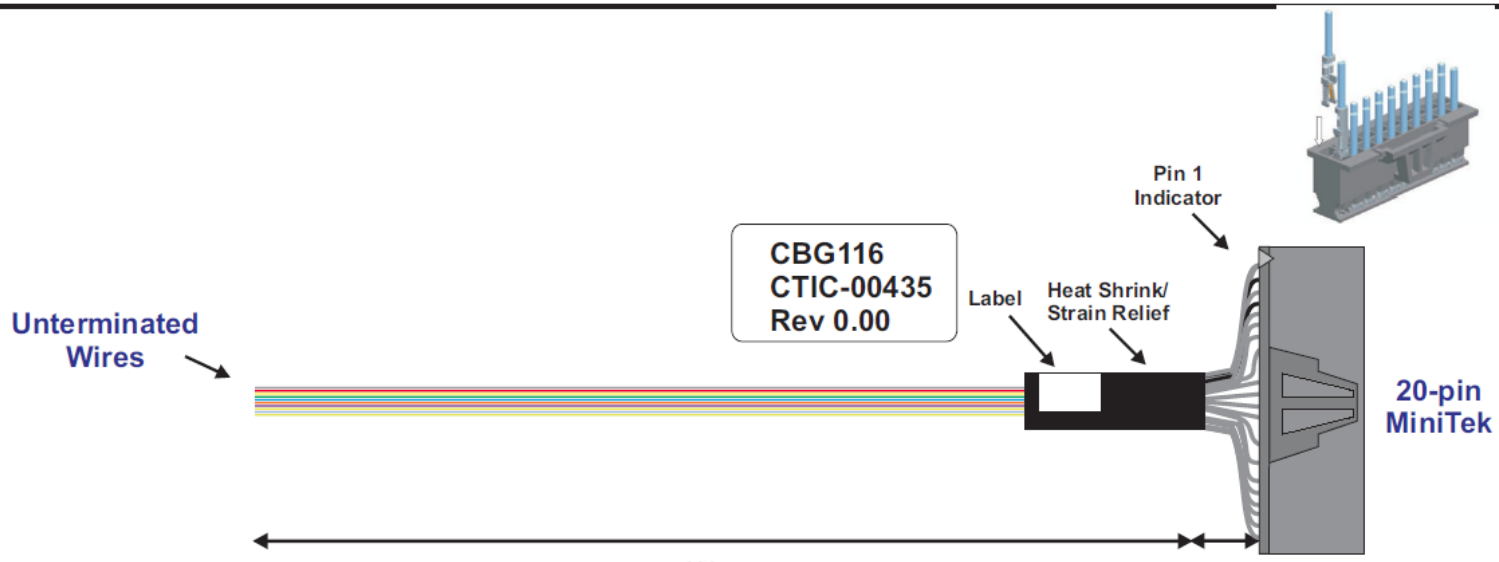

Pinout Information

Signal	Color	20-pin MiniTek
+5V	green	1
Speaker	black	2
+5V	white	3
+5VSB	black	4
Ext CMOS Bat	red	5
GND	yellow/silver	6
System Reset	orange/silver	7
GND	blue/silver	8
Power Button	brown	9
GND	grey/silver	10
Batlow#	yellow	11
GND	orange	12
Sus_S3#	blue	13
GND	brown	14
I2C.CLK	grey	15
GND	green	16
I2C.DAT	purple	17
GND	red/white	18
+5V	blue/black	19
GND	green/white	20

Assembly Notes

1. Cable is made from **RoHS** compliant components and 26-30 AWG
2. FCI 10073599-020LF must be used; along with required crimps 77138
3. All wires except for GND should be different (unique) colors.

Revision History

Revision	Description
0.00	Initial

Connect Tech Inc. *Embedded Computing Experts*	
Part #:	CTIC-00435 / CBG116
Drawn By:	Griffin Lacey
Date:	2013/05/28
Revision:	0.00

CBG117 – RJ45 Ethernet

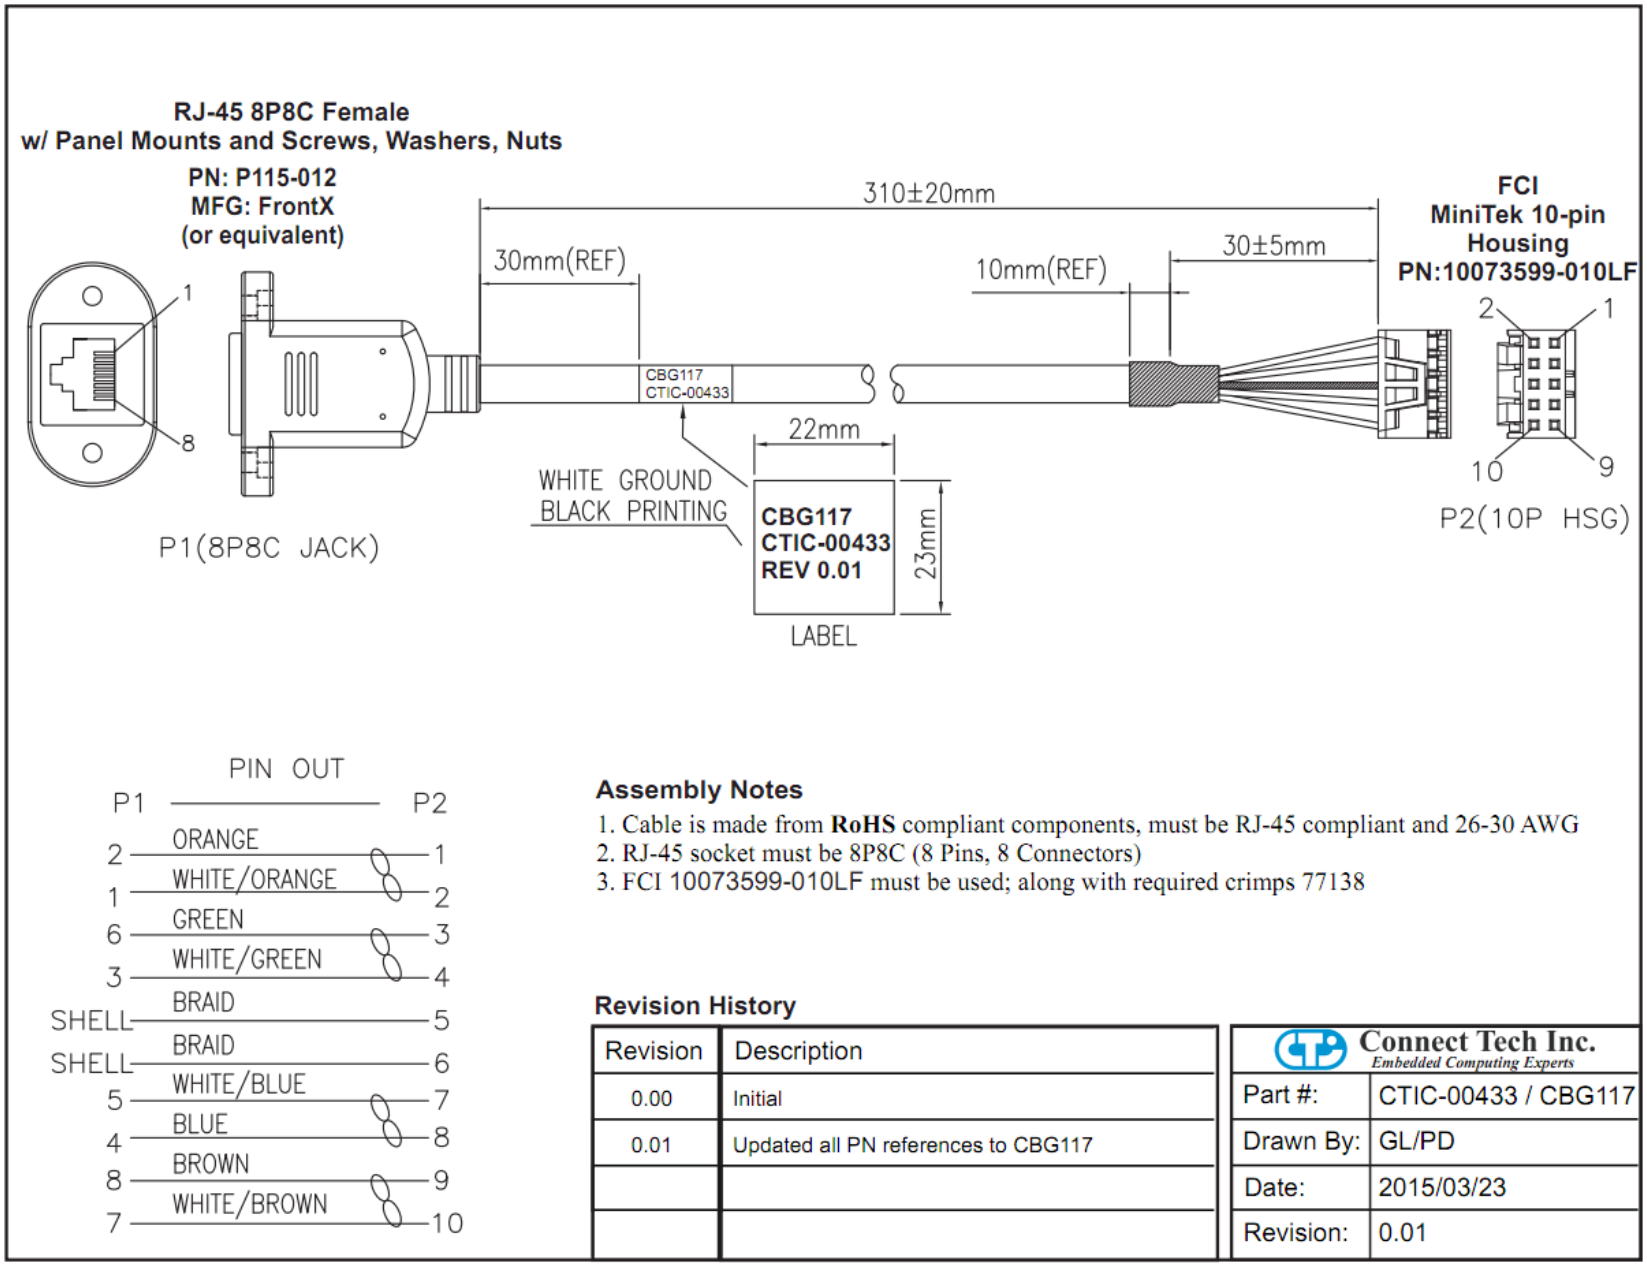

Assembly Notes

1. Cable is made from **RoHS** compliant components, must be RJ-45 compliant and 26-30 AWG
2. RJ-45 socket must be 8P8C (8 Pins, 8 Connectors)
3. FCI 10073599-010LF must be used; along with required crimps 77138

Revision History

Revision	Description
0.00	Initial
0.01	Updated all PN references to CBG117

Connect Tech Inc.
Embedded Computing Experts

Part #:	CTIC-00433 / CBG117
Drawn By:	GL/PD
Date:	2015/03/23
Revision:	0.01

CBG118 – Audio

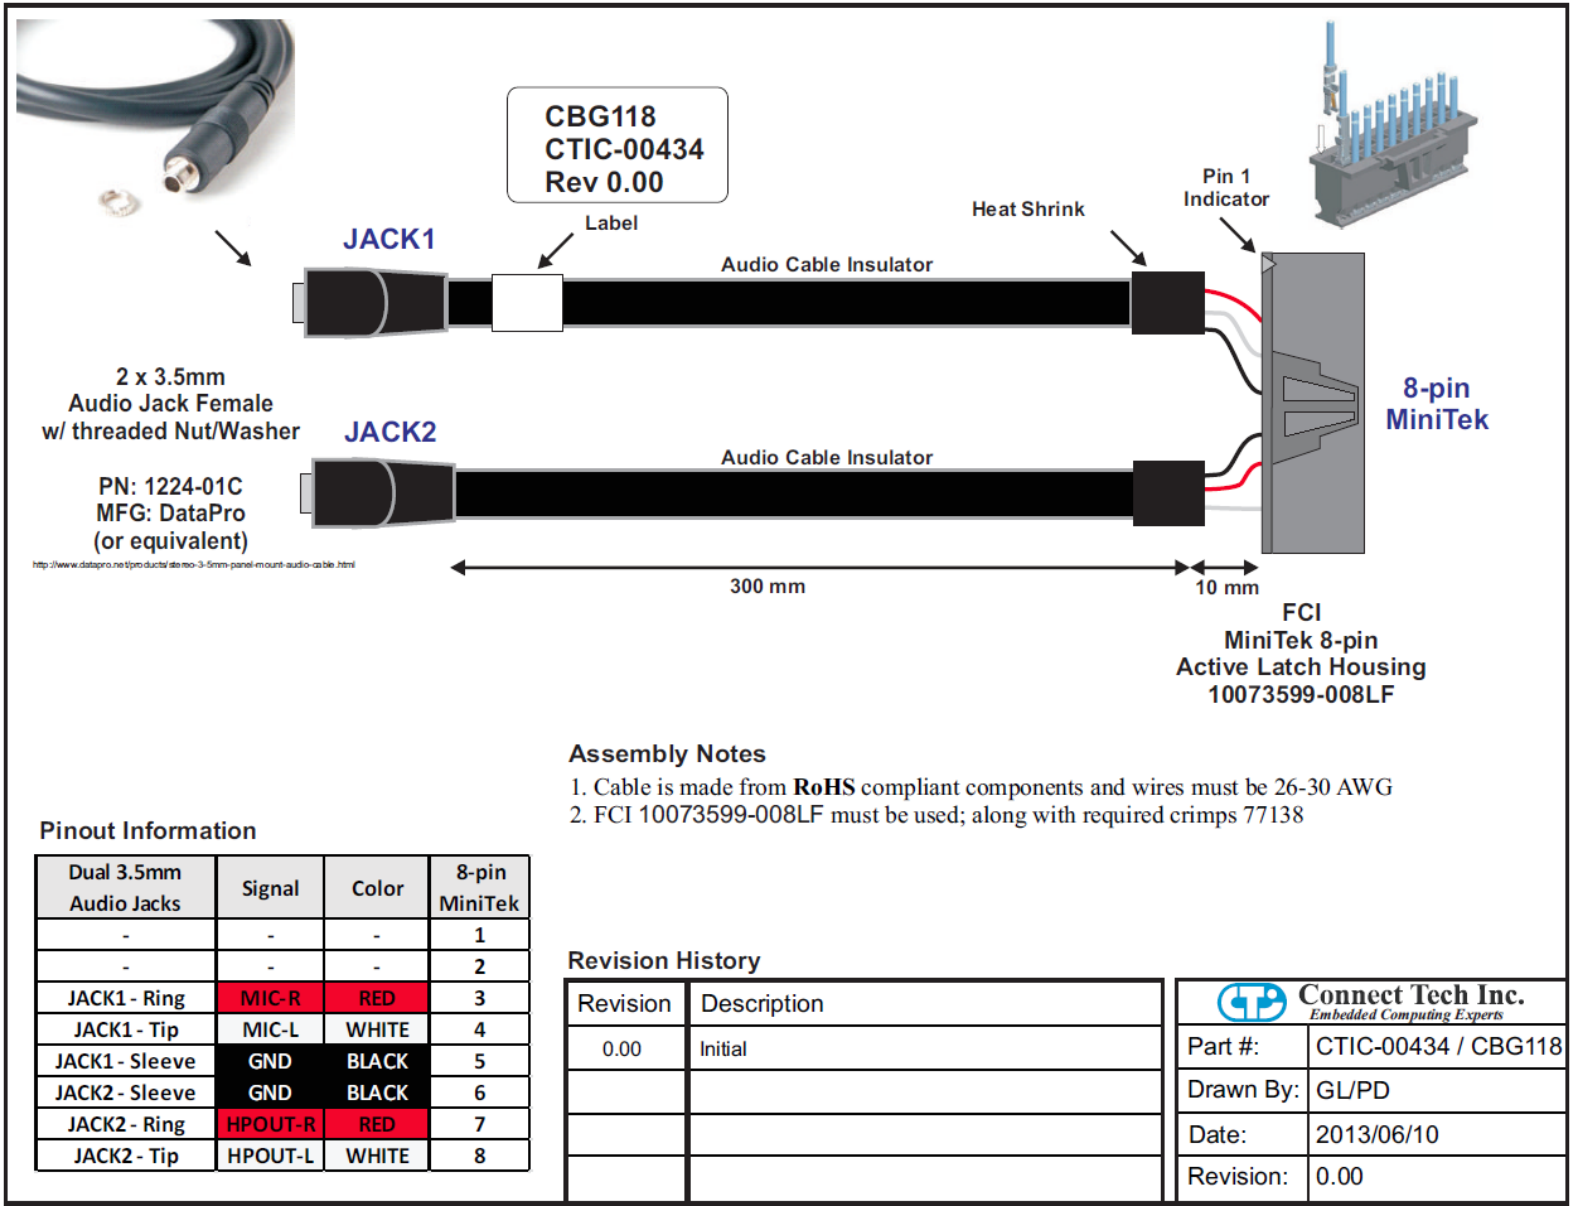

Assembly Notes

1. Cable is made from **RoHS** compliant components and wires must be 26-30 AWG
2. FCI 10073599-008LF must be used; along with required crimps 77138

Pinout Information

Dual 3.5mm Audio Jacks	Signal	Color	8-pin MiniTek
-	-	-	1
-	-	-	2
JACK1 - Ring	MIC-R	RED	3
JACK1 - Tip	MIC-L	WHITE	4
JACK1 - Sleeve	GND	BLACK	5
JACK2 - Sleeve	GND	BLACK	6
JACK2 - Ring	HPOUT-R	RED	7
JACK2 - Tip	HPOUT-L	WHITE	8

Revision History

Revision	Description
0.00	Initial

Connect Tech Inc. Embedded Computing Experts	
Part #:	CTIC-00434 / CBG118
Drawn By:	GL/PD
Date:	2013/06/10
Revision:	0.00

CBG120 - VGA

VGA - HD-15 Female Panel Mount Connector with moulding/cover and hex nut screws

Any of the below or equivalents can be used

Manufacturer	Part Number
Assman	A-HDF15LL-TL-B-R
Sullins	SDS104-PRW2-F15-SN00-1
FCI	10090770-S154ALF
Norcomp	180-015-202L001



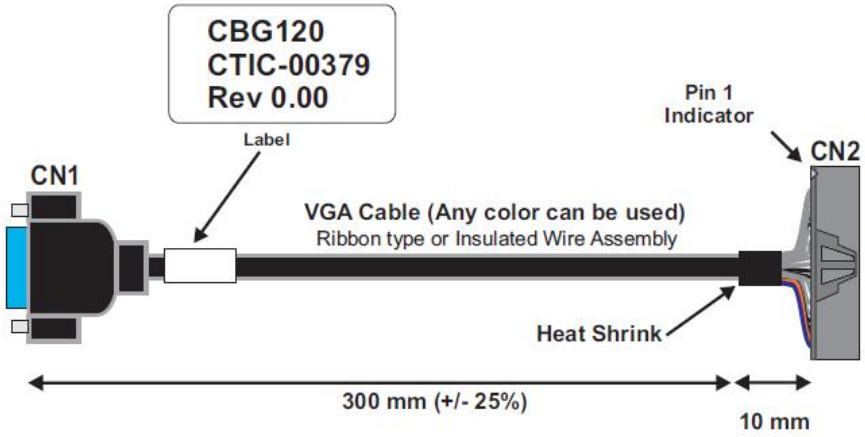

FCI
MiniTek 10-pin
Active Latch Housing
10073599-010LF
crimps: 77138

Pinout Information

CN1 VGA (HD-15)	Signal	CN2 10 Pin Header
1	RED	1
2	GREEN	3
3	BLUE	5
4	NC	-
5	GND	10
6	GND	2
7	GND	2
8	GND	2
9	NC	-
10	GND	10
11	NC	-
12	DDC DATA	8
13	HSync	7
14	VSync	9
15	DDC CLK	6

Assembly Notes

- Cable must be made from **RoHS** compliant components
- Wires must be 26-30 AWG
- Hex nut screws on CN1 must be installed

Revision History

Revision	Description
0.00	Initial

Connect Tech Inc. *Embedded Computing Experts*	
Part #:	CTIC-00379 / CBG120
Drawn By:	Patrick Dietrich
Date:	2013/07/22
Revision:	0.00

CBG121 – Dual DB-9 Serial

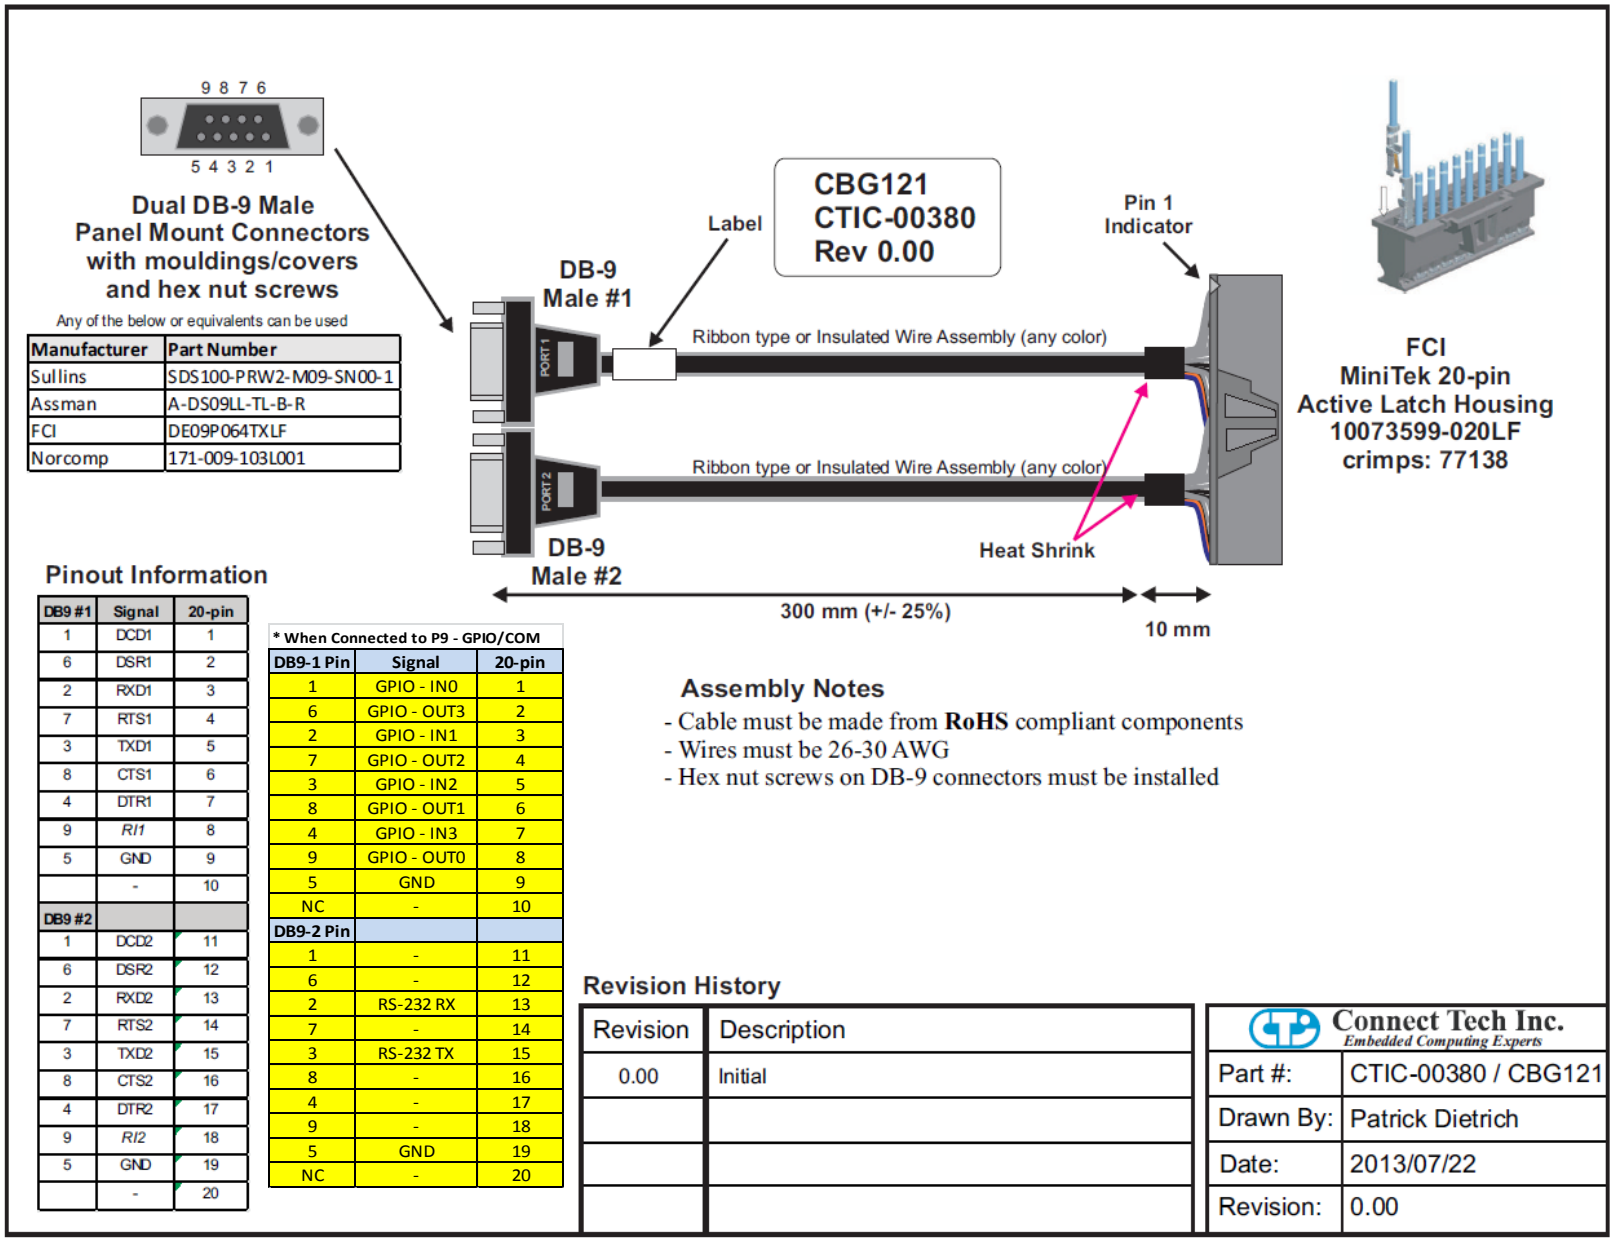

Any of the below or equivalents can be used

Manufacturer	Part Number
Sullins	SDS100-PRW2-M09-SN00-1
Assman	A-DS09LL-TL-B-R
FCI	DE09P064TXLF
Norcomp	171-009-103L001

Pinout Information

DB9 #1	Signal	20-pin
1	DCD1	1
6	DSR1	2
2	RXD1	3
7	RTS1	4
3	TXD1	5
8	CTS1	6
4	DTR1	7
9	*RI1*	8
5	GND	9
	-	10
DB9 #2		
1	DCD2	11
6	DSR2	12
2	RXD2	13
7	RTS2	14
3	TXD2	15
8	CTS2	16
4	DTR2	17
9	*RI2*	18
5	GND	19
	-	20

* When Connected to P9 - GPIO/COM

DB9-1 Pin	Signal	20-pin
1	GPIO - IN0	1
6	GPIO - OUT3	2
2	GPIO - IN1	3
7	GPIO - OUT2	4
3	GPIO - IN2	5
8	GPIO - OUT1	6
4	GPIO - IN3	7
9	GPIO - OUT0	8
5	GND	9
NC	-	10
DB9-2 Pin		
1	-	11
6	-	12
2	RS-232 RX	13
7	-	14
3	RS-232 TX	15
8	-	16
4	-	17
9	-	18
5	GND	19
NC	-	20

Assembly Notes

- Cable must be made from **RoHS** compliant components
- Wires must be 26-30 AWG
- Hex nut screws on DB-9 connectors must be installed

Revision History

Revision	Description
0.00	Initial

Connect Tech Inc.
Embedded Computing Experts

Part #:	CTIC-00380 / CBG121
Drawn By:	Patrick Dietrich
Date:	2013/07/22
Revision:	0.00

CBG113 – Display Port

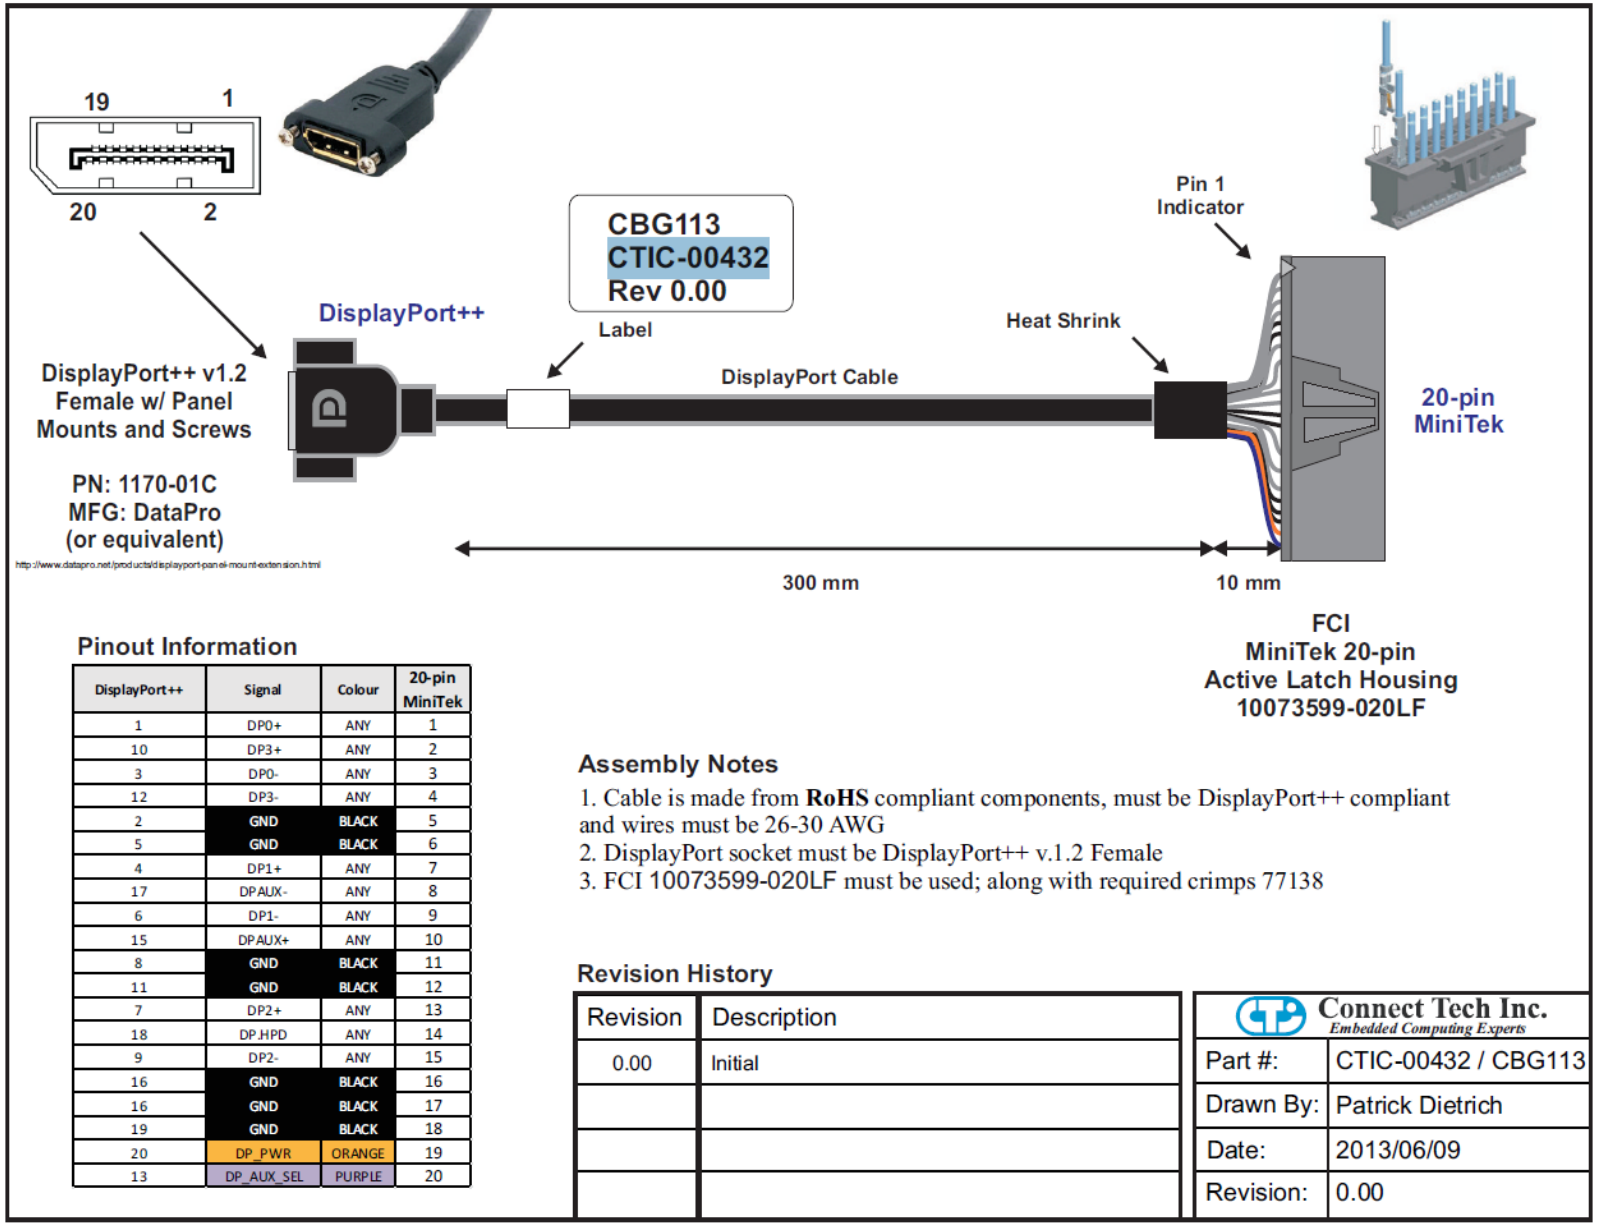

Pinout Information

DisplayPort++	Signal	Colour	20-pin MiniTek
1	DP0+	ANY	1
10	DP3+	ANY	2
3	DP0-	ANY	3
12	DP3-	ANY	4
2	GND	BLACK	5
5	GND	BLACK	6
4	DP1+	ANY	7
17	DPAUX-	ANY	8
6	DP1-	ANY	9
15	DPAUX+	ANY	10
8	GND	BLACK	11
11	GND	BLACK	12
7	DP2+	ANY	13
18	DP.HPD	ANY	14
9	DP2-	ANY	15
16	GND	BLACK	16
16	GND	BLACK	17
19	GND	BLACK	18
20	DP_PWR	ORANGE	19
13	DP_AUX_SEL	PURPLE	20

Assembly Notes

1. Cable is made from **RoHS** compliant components, must be DisplayPort++ compliant and wires must be 26-30 AWG
2. DisplayPort socket must be DisplayPort++ v.1.2 Female
3. FCI 10073599-020LF must be used; along with required crimps 77138

Revision History

Revision	Description
0.00	Initial

Connect Tech Inc. Embedded Computing Experts	
Part #:	CTIC-00432 / CBG113
Drawn By:	Patrick Dietrich
Date:	2013/06/09
Revision:	0.00

CBG130 – Dual USB 2.0 (20-pin version)

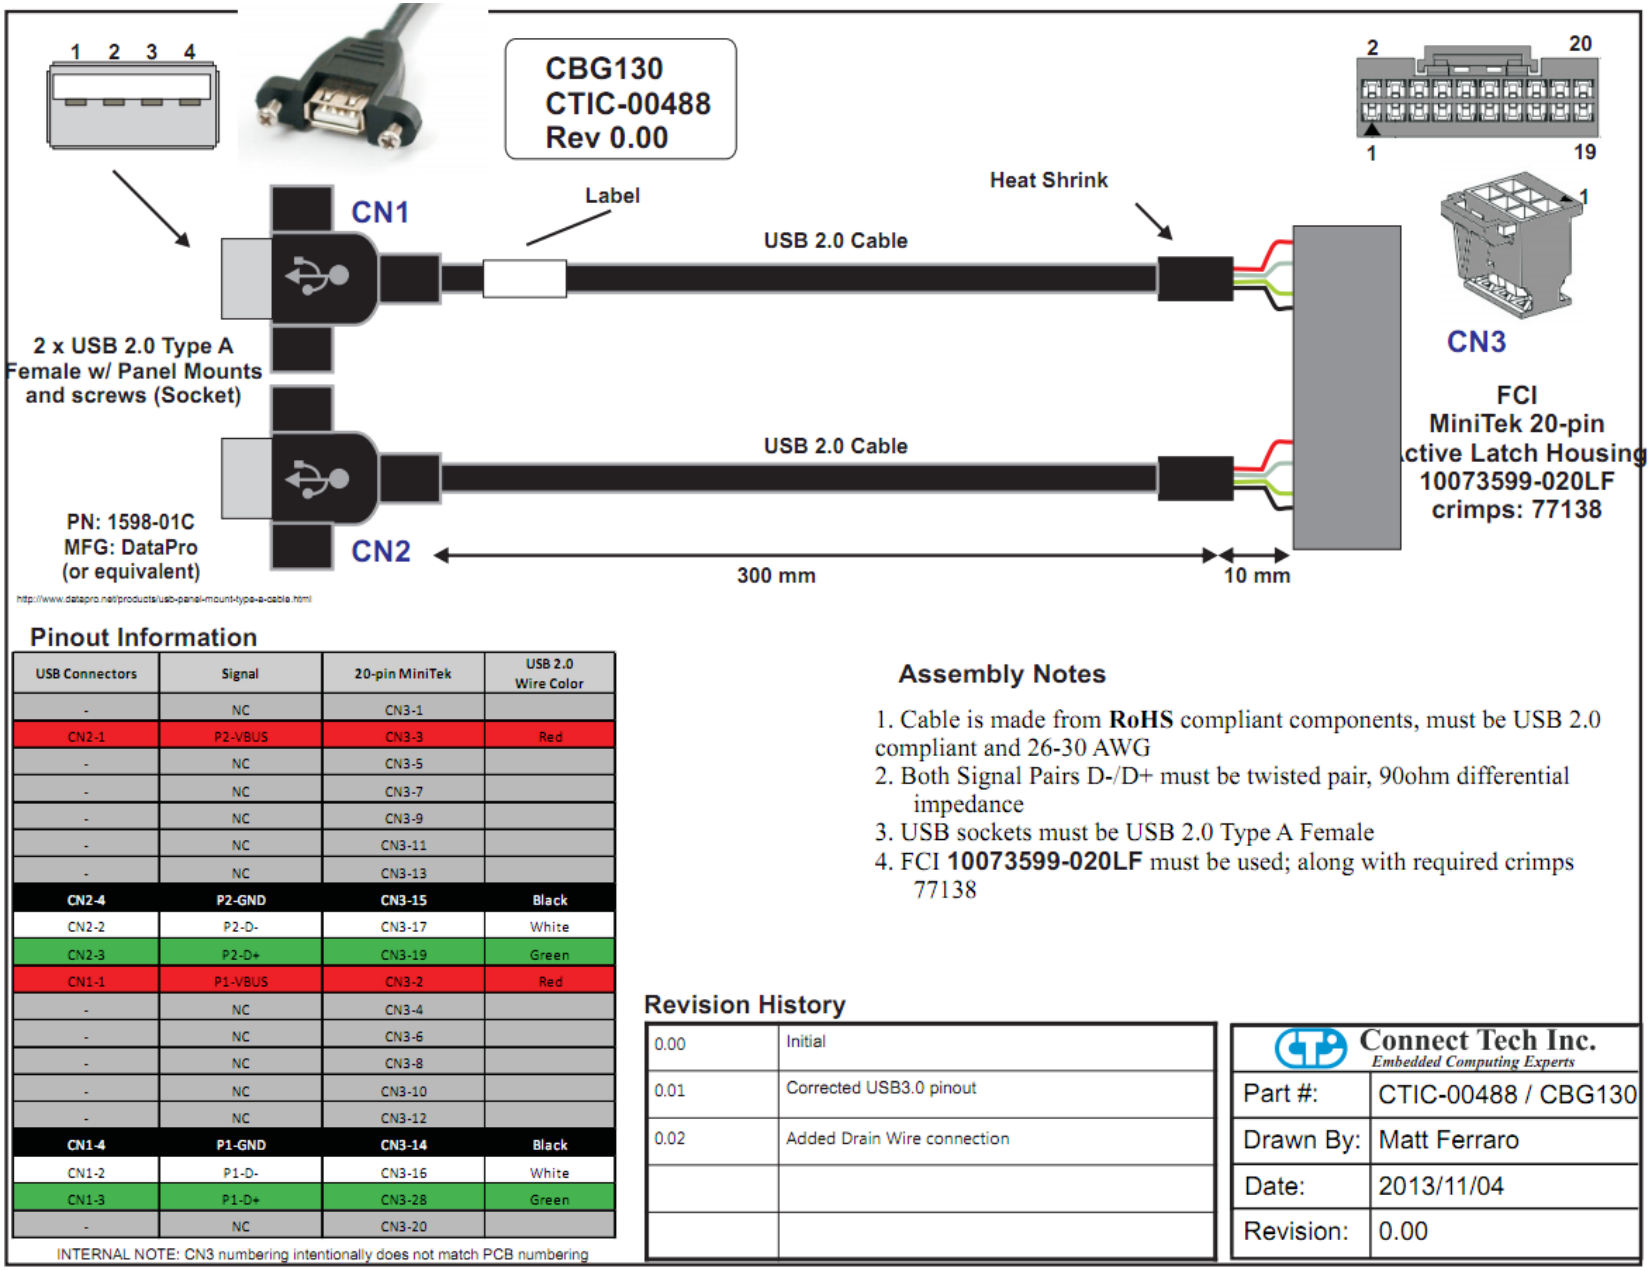

Pinout Information

USB Connectors	Signal	20-pin MiniTek	USB 2.0 Wire Color
-	NC	CN3-1	
CN2-1	P2-VBUS	CN3-3	Red
-	NC	CN3-5	
-	NC	CN3-7	
-	NC	CN3-9	
-	NC	CN3-11	
-	NC	CN3-13	
CN2-4	**P2-GND**	**CN3-15**	**Black**
CN2-2	P2-D-	CN3-17	White
CN2-3	P2-D+	CN3-19	Green
CN1-1	P1-VBUS	CN3-2	Red
-	NC	CN3-4	
-	NC	CN3-6	
-	NC	CN3-8	
-	NC	CN3-10	
-	NC	CN3-12	
CN1-4	**P1-GND**	**CN3-14**	**Black**
CN1-2	P1-D-	CN3-16	White
CN1-3	P1-D+	CN3-28	Green
-	NC	CN3-20	

INTERNAL NOTE: CN3 numbering intentionally does not match PCB numbering

Assembly Notes

1. Cable is made from **RoHS** compliant components, must be USB 2.0 compliant and 26-30 AWG
2. Both Signal Pairs D-/D+ must be twisted pair, 90ohm differential impedance
3. USB sockets must be USB 2.0 Type A Female
4. FCI **10073599-020LF** must be used; along with required crimps 77138

Revision History

0.00	Initial
0.01	Corrected USB3.0 pinout
0.02	Added Drain Wire connection

Connect Tech Inc. *Embedded Computing Experts*	
Part #:	CTIC-00488 / CBG130
Drawn By:	Matt Ferraro
Date:	2013/11/04
Revision:	0.00

CBG131 – Internal USB.30 19-Pin Cable

The CBG131 cable is an OEM 19-pin internal type cable, to panel mountable USB 3.0 Type-A Connector(s).

Hardware	
Cable Jacket Type	PVC - Polyvinyl Chloride
Cable Shield Type	Aluminum-Mylar Foil with Braid
Connector(s)	
Connector A	2 - USB 3.0 A (9 pin; SuperSpeed) Female
Connector B	1 - IDC (20 pin; USB 3.0; Motherboard Header) Female
Physical Characteristics	
Color	Blue
Wire Gauge	28 AWG
Cable Length	1.6 ft [0.5 m]
Product Length	19.7 in [500 mm]
Product Width	1.4 in [36.5 mm]
Product Height	0.5 in [12 mm]
Product Weight	2.5 oz [70 g]

Note: Cable will not ship with bracket

CBG125 – LVDS Unterminated Cable

COLOR	CN1	CN2
Black	1	Flying Lead
White	2	Flying Lead
White	3	Flying Lead
White	4	Flying Lead
White	5	Flying Lead
White	6	Flying Lead
White	7	Flying Lead
White	8	Flying Lead
White	9	Flying Lead
White	10	Flying Lead
White	11	Flying Lead
White	12	Flying Lead
White	13	Flying Lead
White	14	Flying Lead
White	15	Flying Lead
White	16	Flying Lead
White	17	Flying Lead
White	18	Flying Lead
White	19	Flying Lead
White	20	Flying Lead
White	21	Flying Lead
White	22	Flying Lead
White	23	Flying Lead
White	24	Flying Lead
White	25	Flying Lead
White	26	Flying Lead
White	27	Flying Lead
White	28	Flying Lead
White	29	Flying Lead
White	30	Flying Lead
White	31	Flying Lead
White	32	Flying Lead
White	33	Flying Lead
White	34	Flying Lead
White	35	Flying Lead
White	36	Flying Lead
White	37	Flying Lead
White	38	Flying Lead
White	39	Flying Lead
White	40	Flying Lead

CN1 = HIR DF20A-40DS-1C

WIRE = UL1571 AWG 28(7)

LENGTH = "L" = 18.00" +/- 0.25"

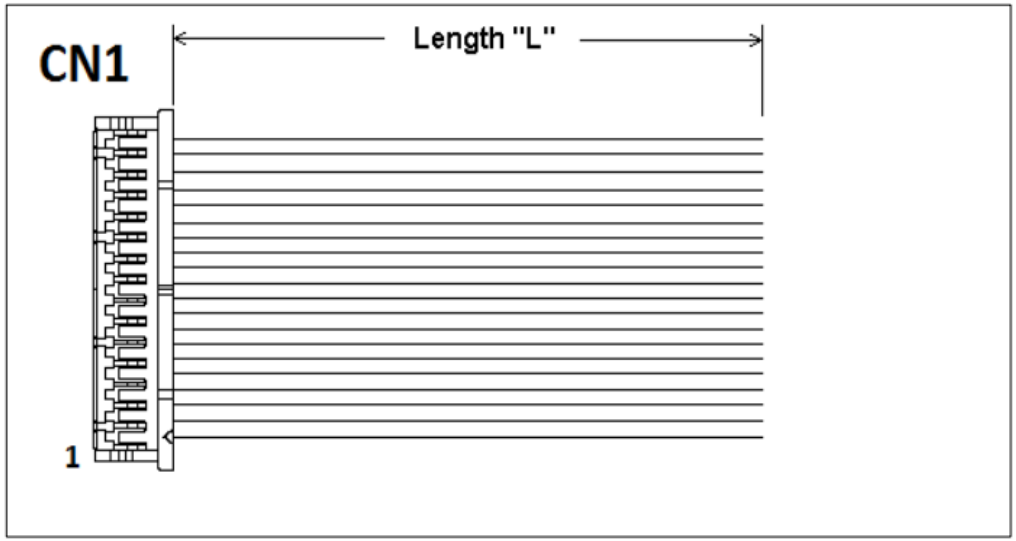

CBG90 – SATA + JST Power Cable

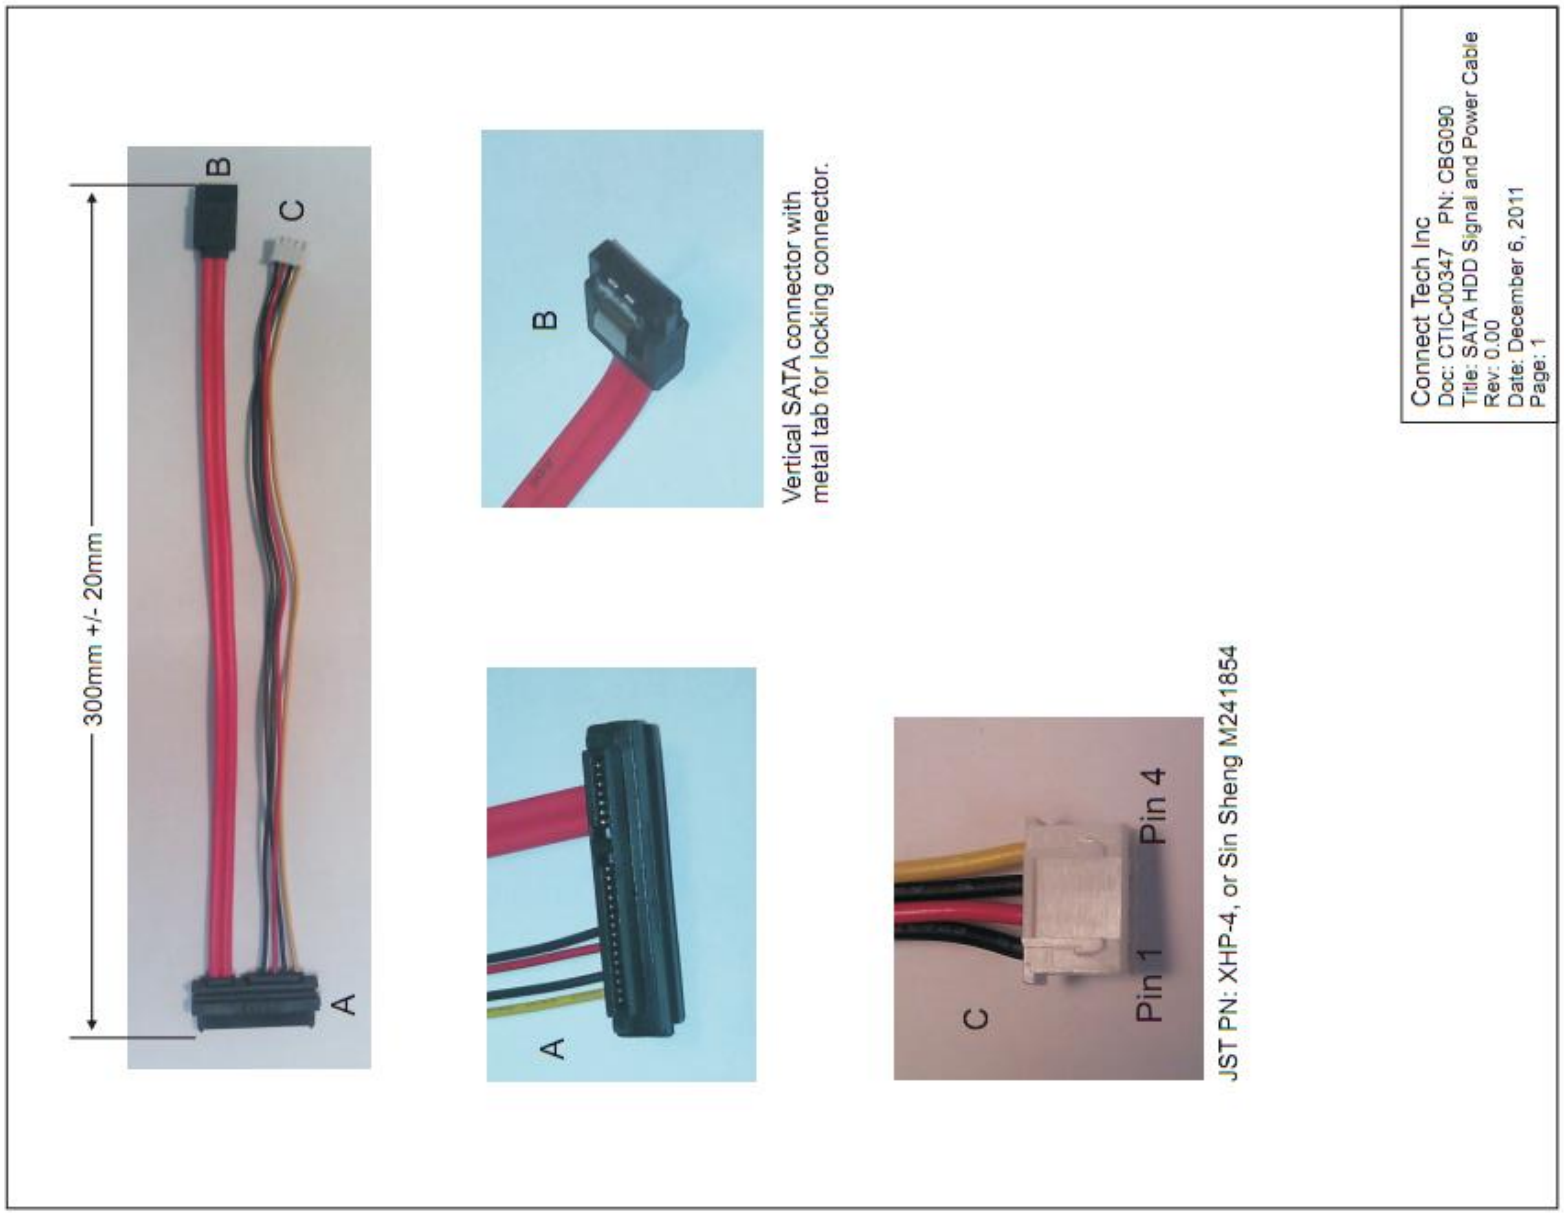

Appendix A – COM Express Signal/Pinout Connection Details

The following table summarizes the COM Express Type-6 Ultra-Lite's COM Express signal/pinout utilization. From this table you will be able to see which COM Express signals have been used and where they are connected to on the carrier. As well No Connection pins are noted as "NC", pull-ups as "PU" and pull-downs as "PD".

COM Express Signal	COM Express Pin	CCG011/12 Connection
GND (FIXED)	A1	GND
GBE0_MDI3-	A2	GBE Port 0 (P24A)
GBE0_MDI3+	A3	GBE Port 0 (P24A)
GBE0_LINK100#	A4	GBE Port 0 (P24A)
GBE0_LINK1000#	A5	GBE Port 0 (P24A)
GBE0_MDI2-	A6	GBE Port 0 (P24A)
GBE0_MDI2+	A7	GBE Port 0 (P24A)
GBE0_LINK#	A8	GBE Port 0 (P24A)
GBE0_MDI1-	A9	GBE Port 0 (P24A)
GBE0_MDI1+	A10	GBE Port 0 (P24A)
GND (FIXED)	A11	GND
GBE0_MDI0-	A12	GBE Port 0 (P24A)
GBE0_MDI0+	A13	GBE Port 0 (P24A)
GBE0_CTREF	A14	GBE Port 0 (P24A)
SUS_S3#	A15	System Header
SATA0_TX+	A16	SATA-0 (P17A)
SATA0_TX-	A17	SATA-0 (P17A)
SUS_S4#	A18	NC
SATA0_RX+	A19	SATA-0 (P17A)
SATA0_RX-	A20	SATA-0 (P17A)
GND (FIXED)	A21	GND
SATA2_TX+	A22	mini-PCIe/mSATA Slot-0
SATA2_TX-	A23	mini-PCIe/mSATA Slot-0
SUS_S5#	A24	NC
SATA2_RX+	A25	mini-PCIe/mSATA Slot-0
SATA2_RX-	A26	mini-PCIe/mSATA Slot-0
BATLOW#	A27	System Header
SATA_ACT#	A28	LED
AC/HDA_SYNC	A29	HD Audio
AC/HDA_RST#	A30	HD Audio
GND (FIXED)	A31	GND
AC/HDA_BITCLK	A32	HD Audio
AC/HDA_SDOUT	A33	HD Audio
BIOS_DIS0#	A34	PU
THRMTRIP#	A35	NC

USB6-	A36	USB2.0 Port 6 (P22)
USB6+	A37	USB2.0 Port 6 (P22)
USB_6_7_OC#	A38	USB2.0 Port 6 (P22)
USB4-	A39	miniPCIe Slot-0 (P12A)
USB4+	A40	miniPCIe Slot-0 (P12A)
GND (FIXED)	A41	GND
USB2-	A42	USB3.0 Port-2 (P3B)
USB2+	A43	USB3.0 Port-2 (P3B)
USB_2_3_OC#	A44	USB3.0 Port-2/3
USB0-	A45	USB3.0 Port-0 (P3A)
USB0+	A46	USB3.0 Port-0 (P3A)
VCC_RTC	A47	RTC Battery
EXCD0_PERST#	A48	NC
EXCD0_CPPE#	A49	NC
LPC_SERIRQ	A50	NC
GND (FIXED)	A51	GND
PCIE_TX5+	A52	NC
PCIE_TX5-	A53	NC
GPI0	A54	GPIO (P9) OR SD Card (P4)
PCIE_TX4+	A55	NC
PCIE_TX4-	A56	NC
GND	A57	GND
PCIE_TX3+	A58	GBE PHY Controller
PCIE_TX3-	A59	GBE PHY Controller
GND (FIXED)	A60	GND
PCIE_TX2+	A61	miniPCIe Slot-1
PCIE_TX2-	A62	miniPCIe Slot-1
GPI1	A63	GPIO (P9) OR SD Card (P4)
PCIE_TX1+	A64	miniPCIe Slot-0
PCIE_TX1-	A65	miniPCIe Slot-0
GND	A66	GND
GPI2	A67	GPIO (P9) OR SD Card (P4)
PCIE_TX0+	A68	4-Port PCIe UART
PCIE_TX0-	A69	4-Port PCIe UART
GND (FIXED)	A70	GND
LVDS_A0+	A71	LVDS Video (P13)
LVDS_A0-	A72	LVDS Video (P13)
LVDS_A1+	A73	LVDS Video (P13)
LVDS_A1-	A74	LVDS Video (P13)
LVDS_A2+	A75	LVDS Video (P13)
LVDS_A2-	A76	LVDS Video (P13)

LVDS_VDD_EN	A77	LVDS Video (P13)
LVDS_A3+	A78	LVDS Video (P13)
LVDS_A3-	A79	LVDS Video (P13)
GND (FIXED)	A80	GND
LVDS_A_CK+	A81	LVDS Video (P13)
LVDS_A_CK-	A82	LVDS Video (P13)
LVDS_I2C_CK	A83	LVDS Video (P13)
LVDS_I2C_DAT	A84	LVDS Video (P13)
GPI3	A85	GPIO (P9) OR SD Card (P4)
RSVD	A86	NC
RSVD	A87	NC
PCIE_CLK_REF+	A88	Main Carrier PCIe Clock
PCIE_CLK_REF-	A89	Main Carrier PCIe Clock
GND (FIXED)	A90	GND
SPI_POWER	A91	NC
SPI_MISO	A92	NC
GPO0	A93	GPIO (P9) OR SD Card (P4)
SPI_CLK	A94	NC
SPI_MOSI	A95	NC
TPM_PP	A96	NC
TYPE10#	A97	NC
SER0_TX	A98	GPIO Ser Connector (P9)
SER0_RX	A99	GPIO Ser Connector (P9)
GND (FIXED)	A100	GND
SER1_TX	A101	NC
SER1_RX	A102	PU
LID#	A103	NC
VCC_12V	A104	Input Power +VIN (P5)
VCC_12V	A105	Input Power +VIN (P5)
VCC_12V	A106	Input Power +VIN (P5)
VCC_12V	A107	Input Power +VIN (P5)
VCC_12V	A108	Input Power +VIN (P5)
VCC_12V	A109	Input Power +VIN (P5)
GND (FIXED)	A110	GND
GND (FIXED)	B1	GND
GBE0_ACT#	B2	GBE Port 0 (P24A)
LPC_FRAME#	B3	NC
LPC_AD0	B4	NC
LPC_AD1	B5	NC
LPC_AD2	B6	NC
LPC_AD3	B7	NC

LPC_DRQ0#	B8	PU
LPC_DRQ1#	B9	PU
LPC_CLK	B10	NC
GND (FIXED)	B11	GND
PWRBTN#	B12	System Header
SMB_CK	B13	System Header
SMB_DAT	B14	System Header
SMB_ALERT#	B15	System Header
SATA1_TX+	B16	SATA-1 (P17B)
SATA1_TX-	B17	SATA-1 (P17B)
SUS_STAT#	B18	NC
SATA1_RX+	B19	SATA-1 (P17B)
SATA1_RX-	B20	SATA-1 (P17B)
GND (FIXED)	B21	GND
SATA3_TX+	B22	miniPCIe/mSATA Slot-1
SATA3_TX-	B23	miniPCIe/mSATA Slot-1
PWR_OK	B24	System Header
SATA3_RX+	B25	miniPCIe/mSATA Slot-1
SATA3_RX-	B26	miniPCIe/mSATA Slot-1
WDT	B27	NC
AC/HDA_SDIN2	B28	PD
AC/HDA_SDIN1	B29	PD
AC/HDA_SDIN0	B30	HD Audio
GND (FIXED)	B31	GND
SPKR	B32	System Header
I2C_CK	B33	System Header
I2C_DAT	B34	System Header
THRM#	B35	PU
USB7-	B36	USB2.0 Port 7 (P22)
USB7+	B37	USB2.0 Port 7 (P22)
USB_4_5_OC#	B38	USB2.0 Port 7 (P22)
USB5-	B39	miniPCIe Slot-1 (P12B)
USB5+	B40	miniPCIe Slot-1 (P12B)
GND (FIXED)	B41	GND
USB3-	B42	USB3.0 Port-3 (P3A)
USB3+	B43	USB3.0 Port-3 (P3A)
USB_0_1_OC#	B44	USB3.0 Port-0/1
USB1-	B45	USB3.0 Port-1 (P3A)
USB1+	B46	USB3.0 Port-1 (P3A)
EXCD1_PERST#	B47	NC
EXCD1_CPPE#	B48	NC

SYS_RESET#	B49	System Header
CB_RESET#	B50	Carrier Board Internal Circuitry
GND (FIXED)	B51	GND
PCIE_RX5+	B52	NC
PCIE_RX5-	B53	NC
GPO1	B54	GPIO (P9) OR SD Card (P4)
PCIE_RX4+	B55	NC
PCIE_RX4-	B56	NC
GPO2	B57	GPIO (P9) OR SD Card (P4)
PCIE_RX3+	B58	GBE PHY Controller
PCIE_RX3-	B59	GBE PHY Controller
GND (FIXED)	B60	GND
PCIE_RX2+	B61	miniPCIe Slot-1
PCIE_RX2-	B62	miniPCIe Slot-1
GPO3	B63	GPIO (P9) OR SD Card (P4)
PCIE_RX1+	B64	miniPCIe Slot-0
PCIE_RX1-	B65	miniPCIe Slot-0
WAKE0#	B66	NC
WAKE1#	B67	NC
PCIE_RX0+	B68	4-Port PCIe UART
PCIE_RX0-	B69	4-Port PCIe UART
GND (FIXED)	B70	GND
LVDS_B0+	B71	LVDS Video (P13)
LVDS_B0-	B72	LVDS Video (P13)
LVDS_B1+	B73	LVDS Video (P13)
LVDS_B1-	B74	LVDS Video (P13)
LVDS_B2+	B75	LVDS Video (P13)
LVDS_B2-	B76	LVDS Video (P13)
LVDS_B3+	B77	LVDS Video (P13)
LVDS_B3-	B78	LVDS Video (P13)
LVDS_BKLT_EN	B79	LVDS Video (P13)
GND (FIXED)	B80	GND
LVDS_B_CK+	B81	LVDS Video (P13)
LVDS_B_CK-	B82	LVDS Video (P13)
LVDS_BKLT_CTRL	B83	LVDS Video (P13)
VCC_5V_SBY	B84	System Header (Ferrite Connected to +5V)
VCC_5V_SBY	B85	System Header (Ferrite Connected to +5V)
VCC_5V_SBY	B86	System Header (Ferrite Connected to +5V)
VCC_5V_SBY	B87	System Header (Ferrite Connected to

		+5V)
BIOS_DIS1#	B88	PU
VGA_RED	B89	VGA Video
GND (FIXED)	B90	GND
VGA_GRN	B91	VGA Video
VGA_BLU	B92	VGA Video
VGA_HSYNC	B93	VGA Video
VGA_VSYNC	B94	VGA Video
VGA_I2C_CK	B95	VGA Video
VGA_I2C_DAT	B96	VGA Video
SPI_CS#	B97	NC
RSVD	B98	NC
RSVD	B99	NC
GND (FIXED)	B100	GND
FAN_PWMOUT	B101	NC
FAN_TACHOIN	B102	Fan Connector
SLEEP#	B103	NC
VCC_12V	B104	Input Power +VIN (P5)
VCC_12V	B105	Input Power +VIN (P5)
VCC_12V	B106	Input Power +VIN (P5)
VCC_12V	B107	Input Power +VIN (P5)
VCC_12V	B108	Input Power +VIN (P5)
VCC_12V	B109	Input Power +VIN (P5)
GND (FIXED)	B110	GND
GND (FIXED)	C1	GND
GND	C2	GND
USB_SSRX0-	C3	USB3.0 Port-0 (P3A)
USB_SSRX0+	C4	USB3.0 Port-0 (P3A)
GND	C5	GND
USB_SSRX1-	C6	USB3.0 Port-1 (P3A)
USB_SSRX1+	C7	USB3.0 Port-1 (P3A)
GND	C8	GND
USB_SSRX2-	C9	USB3.0 Port-2 (P3B)
USB_SSRX2+	C10	USB3.0 Port-2 (P3B)
GND (FIXED)	C11	GND
USB_SSRX3-	C12	USB3.0 Port-2 (P3B)
USB_SSRX3+	C13	USB3.0 Port-2 (P3B)
GND	C14	GND
DDI1_PAIR6+	C15	NC
DDI1_PAIR6-	C16	NC
RSVD	C17	NC

RSVD	C18	NC
PCIE_RX6+	C19	NC
PCIE_RX6-	C20	NC
GND (FIXED)	C21	GND
PCIE_RX7+	C22	NC
PCIE_RX7-	C23	NC
DDI1_HPD	C24	DisplayPort++ Channel 1 (P2A)
DDI1_PAIR4+	C25	NC
DDI1_PAIR4-	C26	NC
RSVD	C27	NC
RSVD	C28	NC
DDI1_PAIR5+	C29	NC
DDI1_PAIR5-	C30	NC
GND (FIXED)	C31	GND
DDI2_CTRLCLK_AUX+	C32	DisplayPort++ Channel 2 (P2A)
DDI2_CTRLDATA_AUX-	C33	DisplayPort++ Channel 2 (P2A)
DDI2_DDC_AUX_SEL	C34	DisplayPort++ Channel 2 (P2A)
RSVD	C35	NC
DDI3_CTRLCLK_AUX+	C36	NC
DDI3_CTRLDATA_AUX-	C37	NC
DDI3_DDC_AUX_SEL	C38	NC
DDI3_PAIR0+	C39	NC
DDI3_PAIR0-	C40	NC
GND (FIXED)	C41	GND
DDI3_PAIR1+	C42	NC
DDI3_PAIR1-	C43	NC
DDI3_HPD	C44	NC
RSVD	C45	NC
DDI3_PAIR2+	C46	NC
DDI3_PAIR2-	C47	NC
RSVD	C48	NC
DDI3_PAIR3+	C49	NC
DDI3_PAIR3-	C50	NC
GND (FIXED)	C51	GND
PEG_RX0+	C52	NC
PEG_RX0-	C53	NC
TYPE0#	C54	NC
PEG_RX1+	C55	NC
PEG_RX1-	C56	NC
TYPE1#	C57	NC
PEG_RX2+	C58	NC

PEG_RX2-	C59	NC
GND (FIXED)	C60	GND
PEG_RX3+	C61	NC
PEG_RX3-	C62	NC
RSVD	C63	NC
RSVD	C64	NC
PEG_RX4+	C65	NC
PEG_RX4-	C66	NC
RSVD	C67	NC
PEG_RX5+	C68	NC
PEG_RX5-	C69	NC
GND (FIXED)	C70	GND
PEG_RX6+	C71	NC
PEG_RX6-	C72	NC
GND	C73	GND
PEG_RX7+	C74	NC
PEG_RX7-	C75	NC
GND	C76	GND
RSVD	C77	NC
PEG_RX8+	C78	NC
PEG_RX8-	C79	NC
GND (FIXED)	C80	GND
PEG_RX9+	C81	NC
PEG_RX9-	C82	NC
RSVD	C83	NC
GND	C84	GND
PEG_RX10+	C85	NC
PEG_RX10-	C86	NC
GND	C87	NC
PEG_RX11+	C88	NC
PEG_RX11-	C89	NC
GND (FIXED)	C90	GND
PEG_RX12+	C91	NC
PEG_RX12-	C92	NC
GND	C93	GND
PEG_RX13+	C94	NC
PEG_RX13-	C95	NC
GND	C96	GND
RSVD	C97	NC
PEG_RX14+	C98	NC
PEG_RX14-	C99	NC

GND (FIXED)	C100	GND
PEG_RX15+	C101	NC
PEG_RX15-	C102	NC
GND	C103	GND
VCC_12V	C104	Input Power +VIN (P5)
VCC_12V	C105	Input Power +VIN (P5)
VCC_12V	C106	Input Power +VIN (P5)
VCC_12V	C107	Input Power +VIN (P5)
VCC_12V	C108	Input Power +VIN (P5)
VCC_12V	C109	Input Power +VIN (P5)
GND (FIXED)	C110	GND
GND (FIXED)	D1	GND
GND	D2	GND
USB_SSTX0-	D3	USB3.0 Port-0 (P3A)
USB_SSTX0+	D4	USB3.0 Port-0 (P3A)
GND	D5	GND
USB_SSTX1-	D6	USB3.0 Port-1 (P3A)
USB_SSTX1+	D7	USB3.0 Port-1 (P3A)
GND	D8	GND
USB_SSTX2-	D9	USB3.0 Port-2 (P3B)
USB_SSTX2+	D10	USB3.0 Port-2 (P3B)
GND (FIXED)	D11	GND
USB_SSTX3-	D12	USB3.0 Port-2 (P3B)
USB_SSTX3+	D13	USB3.0 Port-2 (P3B)
GND	D14	GND
DDI1_CTRLCLK_AUX+	D15	DisplayPort++ Channel 1 (P2A)
DDI1_CTRLDATA_AUX-	D16	DisplayPort++ Channel 1 (P2A)
RSVD	D17	NC
RSVD	D18	NC
PCIE_TX6+	D19	NC
PCIE_TX6-	D20	NC
GND (FIXED)	D21	GND
PCIE_TX7+	D22	NC
PCIE_TX7-	D23	NC
RSVD	D24	NC
RSVD	D25	NC
DDI1_PAIR0+	D26	DisplayPort++ Channel 1 (P2A)
DDI1_PAIR0-	D27	DisplayPort++ Channel 1 (P2A)
RSVD	D28	NC
DDI1_PAIR1+	D29	DisplayPort++ Channel 1 (P2A)
DDI1_PAIR1-	D30	DisplayPort++ Channel 1 (P2A)

GND (FIXED)	D31	GND
DDI1_PAIR2+	D32	DisplayPort++ Channel 1 (P2A)
DDI1_PAIR2-	D33	DisplayPort++ Channel 1 (P2A)
DDI1_DDC_AUX_SEL	D34	PU
RSVD	D35	NC
DDI1_PAIR3+	D36	DisplayPort++ Channel 1 (P2A)
DDI1_PAIR3-	D37	DisplayPort++ Channel 1 (P2A)
RSVD	D38	NC
DDI2_PAIR0+	D39	DisplayPort++ Channel 2 (P2A)
DDI2_PAIR0-	D40	DisplayPort++ Channel 2 (P2A)
GND (FIXED)	D41	GND
DDI2_PAIR1+	D42	DisplayPort++ Channel 2 (P2A)
DDI2_PAIR1-	D43	DisplayPort++ Channel 2 (P2A)
DDI2_HPD	D44	DisplayPort++ Channel 2 (P2A)
RSVD	D45	NC
DDI2_PAIR2+	D46	DisplayPort++ Channel 2 (P2A)
DDI2_PAIR2-	D47	DisplayPort++ Channel 2 (P2A)
RSVD	D48	NC
DDI2_PAIR3+	D49	DisplayPort++ Channel 2 (P2A)
DDI2_PAIR3-	D50	DisplayPort++ Channel 2 (P2A)
GND (FIXED)	D51	GND
PEG_TX0+	D52	NC
PEG_TX0-	D53	NC
PEG_LANE_RV#	D54	NC
PEG_TX1+	D55	NC
PEG_TX1-	D56	NC
TYPE2#	D57	NC
PEG_TX2+	D58	NC
PEG_TX2-	D59	NC
GND (FIXED)	D60	GND
PEG_TX3+	D61	NC
PEG_TX3-	D62	NC
RSVD	D63	NC
RSVD	D64	NC
PEG_TX4+	D65	NC
PEG_TX4-	D66	NC
GND	D67	GND
PEG_TX5+	D68	NC
PEG_TX5-	D69	NC
GND (FIXED)	D70	GND
PEG_TX6+	D71	NC

PEG_TX6-	D72	NC
GND	D73	GND
PEG_TX7+	D74	NC
PEG_TX7-	D75	NC
GND	D76	GND
RSVD	D77	NC
PEG_TX8+	D78	NC
PEG_TX8-	D79	NC
GND (FIXED)	D80	GND
PEG_TX9+	D81	NC
PEG_TX9-	D82	NC
RSVD	D83	NC
GND	D84	GND
PEG_TX10+	D85	NC
PEG_TX10-	D86	NC
GND	D87	GND
PEG_TX11+	D88	NC
PEG_TX11-	D89	NC
GND (FIXED)	D90	GND
PEG_TX12+	D91	NC
PEG_TX12-	D92	NC
GND	D93	GND
PEG_TX13+	D94	NC
PEG_TX13-	D95	NC
GND	D96	GND
RSVD	D97	NC
PEG_TX14+	D98	NC
PEG_TX14-	D99	NC
GND (FIXED)	D100	GND
PEG_TX15+	D101	NC
PEG_TX15-	D102	NC
GND	D103	GND
VCC_12V	D104	Input Power +VIN (P5)
VCC_12V	D105	Input Power +VIN (P5)
VCC_12V	D106	Input Power +VIN (P5)
VCC_12V	D107	Input Power +VIN (P5)
VCC_12V	D108	Input Power +VIN (P5)
VCC_12V	D109	Input Power +VIN (P5)
GND (FIXED)	D110	GND